


CT-409



KNC

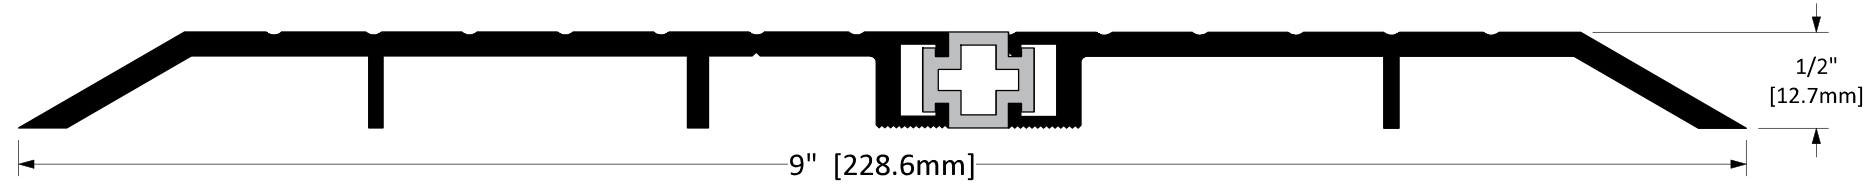

| | |
|--------------------|--|
| Operation | Thermal Break Threshold |
| Features | <ul style="list-style-type: none"> • Mill Finish Extruded Aluminum • Insert included |
| Application | <ul style="list-style-type: none"> • Ideal for Residential, Commercial & Industrial |

Finish Options

STD Mill Finish

Screw Options

Standard



Screw Type: **G**
 3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey Phillips Drive, Concrete Screws
 (5/32" Pre-Drill Required)

Optional



Screw Type: **H**
 #10 X 1-3/4" Stainless Steel Flat Head, Robertson Drive, Type A Screws
 (Complete With Nylon Anchor)



Screw Type: **I**
 #10 X 2" Stainless Steel Flat Head, Tamper-Resistant Torx Drive, Type A Screws
 (Complete With Nylon Anchor)

Customer Name: _____ Job No./Name: _____ Date: _____ Provided By: _____

Notes: