


CT-42-1

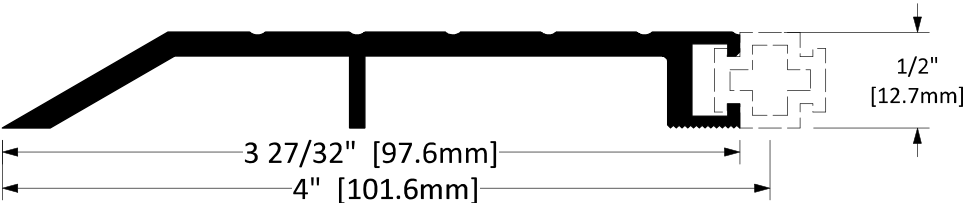

Operation	Thermal Break Threshold
Features	<ul style="list-style-type: none">• Mill Finish Extruded Aluminum• Insert not included
Application	<ul style="list-style-type: none">• Ideal for Residential, Commercial & Industrial

Customer Name:

Job No./Name:

Date:

Notes:


STD
OPT

Finish Options

- Mill Finish
- Bronze Anodized
- Black Anodized
- Clear Anodized

Screw Options

Standard




Screw Type: **G**
3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey Phillips Drive, Concrete Screws (5/32" Pre-Drill Required)

Optional



Screw Type: **H**
#10 X 1-3/4" Stainless Steel Flat Head, Robertson Drive, Type A Screws (Complete With Nylon Anchor)



Screw Type: **I**
#10 X 2" Stainless Steel Flat Head, Tamper-Resistant Torx Drive, Type A Screws (Complete With Nylon Anchor)

Provided By: