


CT-706

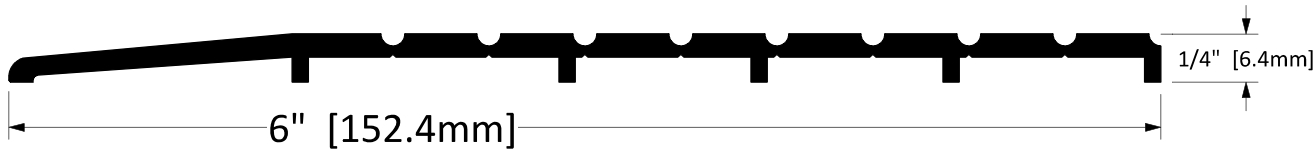

STD  
OPT

Finish Options

- Mill Finish
- Bronze Anodized
- Black Anodized
- Clear Anodized

Screw Options

Standard




Screw Type: **G**  
3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey  
Phillips Drive, Concrete Screws  
(5/32" Pre-Drill Required)

Optional



Screw Type: **H**  
#10 X 1-3/4" Stainless Steel Flat Head,  
Robertson Drive, Type A Screws  
(Complete With Nylon Anchor)



Screw Type: **I**  
#10 X 2" Stainless Steel Flat  
Head, Tamper-Resistant Torx  
Drive, Type A Screws  
(Complete With Nylon Anchor)

Operation	Threshold
Features	<ul style="list-style-type: none"><li>Mill Finish Extruded Aluminum</li></ul>
Application	<ul style="list-style-type: none"><li>Ideal for Residential, Commercial &amp; Industrial</li></ul>

Customer Name:

Job No./Name:

Date:

Provided By:

Notes: