

CT-707

NEW

KNC




STD

Finish Options


Mill Finish

Screw Options


Standard




Screw Type: **G**
3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey
Phillips Drive, Concrete Screws
(5/32" Pre-Drill Required)



Screw Type: **H**
1/4" X 1-3/4" Stainless Steel Flat Head,
Robertson Drive, Type A Screws
(Complete With Nylon Anchor)



Screw Type: **I**
#10 X 2" Stainless Steel Flat
Head, Tamper-Resistant Torx
Drive, Type A Screws
(Complete With Nylon Anchor)

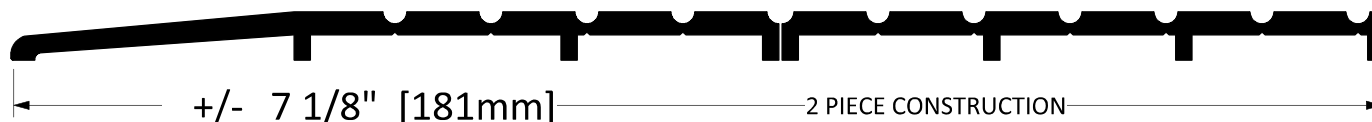

Operation	Threshold
Features	<ul style="list-style-type: none">Mill Finish Extruded Aluminum
Application	<ul style="list-style-type: none">Ideal for Residential, Commercial & Industrial

Customer Name:

Job No./Name:

Date:

Provided By:

Notes:

KN Crowder

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
T. 1-866-999-1562 customerservice@kncrowder.com kncrowder.com
© 2020-2022 K.N. Crowder Mfg. Inc. All Rights Reserved.