

CT-87



STD

Finish Options

Mill Finish

Standard

Screw Options




Screw Type: **G**
 3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey Phillips Drive, Concrete Screws
 (5/32" Pre-Drill Required)


Optional



Screw Type: **H**
 #10 X 1-3/4" Stainless Steel Flat Head, Robertson Drive, Type A Screws
 (Complete With Nylon Anchor)



Screw Type: **I**
 #10 X 2" Stainless Steel Flat Head, Tamper-Resistant Torx Drive, Type A Screws
 (Complete With Nylon Anchor)

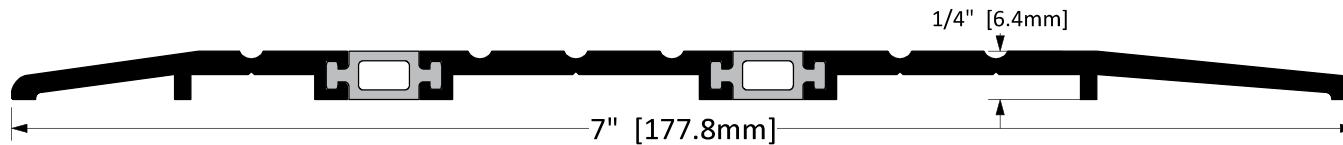

Operation	Thermal Break Threshold
Features	Mill Finish Extruded Aluminum Inserts included
Application	Ideal for Residential, Commercial & Industrial

Customer Name: _____ Job No./Name: _____ Date: _____

Provided By: _____

Notes: