


# CT-8756

**NEW**

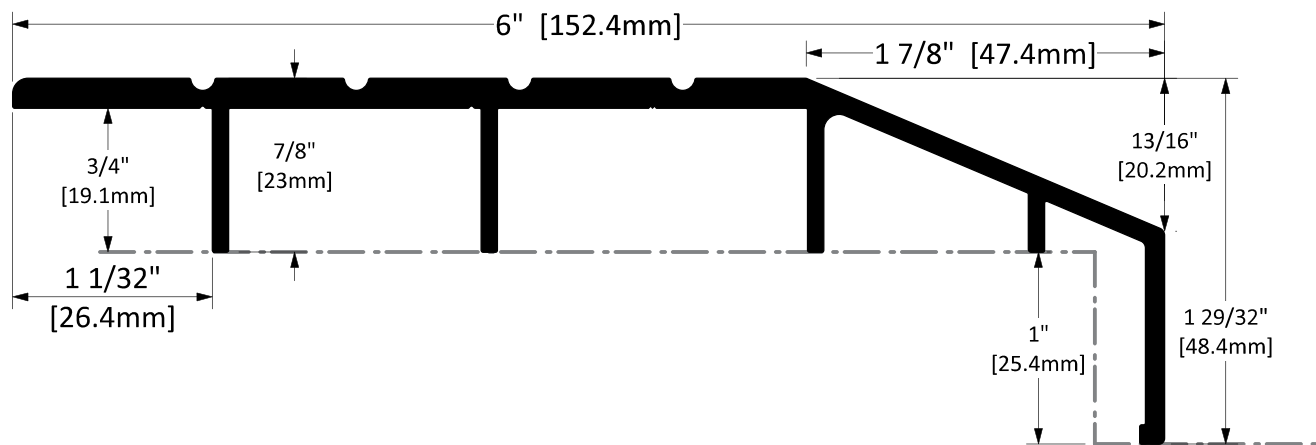

## Finish Options

STD

Mill Finish


## Screw Options

Standard




Screw Type: **G**  
 3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey Phillips Drive, Concrete Screws (5/32" Pre-Drill Required)

Optional



Screw Type: **H**  
 #10 X 1-3/4" Stainless Steel Flat Head, Robertson Drive, Type A Screws (Complete With Nylon Anchor)



Screw Type: **I**  
 #10 X 2" Stainless Steel Flat Head, Tamper-Resistant Torx Drive, Type A Screws (Complete With Nylon Anchor)

|                    |  |
|--------------------|--|
| <b>Operation</b>   | Balcony Threshold  |
| <b>Features</b>    | <ul style="list-style-type: none"> <li>Mill Finish Extruded Aluminum</li> </ul>                      |
| <b>Application</b> | <ul style="list-style-type: none"> <li>Ideal for Residential, Commercial &amp; Industrial</li> </ul> |

Customer Name:

Job No./Name:

Date:

Provided By:

Notes: