

C-2035-GT



FEATURES

- 60 lbs. [27 kg] weight capacity
- Hangers feature slotted holes for vertical adjustment
- Nylon wheels provide smooth and quiet door operation
- Cycle tested for up to 150,000 cycles without fail
- Anodized or powder-coated finishes also available
- For 3/4 in [19 mm] or 1 3/8 in [34.9 mm] thick doors

COMPLETE 2 DOOR KIT BREAKDOWN



1 - C-2035 Double Track with Built-In Fascia

x length based on kit size (e.g. 72 in [1829 mm] kit for 36 in [914 mm] wide door)




2 - C-2025 3/8 in [9.5 mm] Hangers

complete with screws



2 - C-2025 5/8 in [15.8 mm] Hangers

complete with screws



1 - C-238 Double Groove Guide Threshold

x length based on kit size (e.g. 36 in [914 mm] guide channel for 72 in [1829 mm] kit)



4 - C-200 Guides

complete with screws

OPTIONAL

Door Locks & Pulls



Customer Name

Job No./Name

Date


Provided By

Notes


C-2035-GT



COMPLETE ELEVATION VIEW

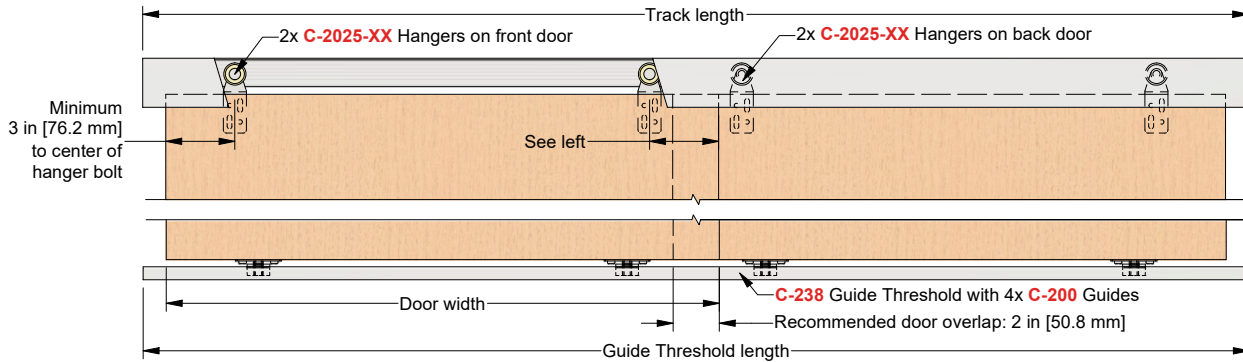

PRODUCT DIMENSIONS

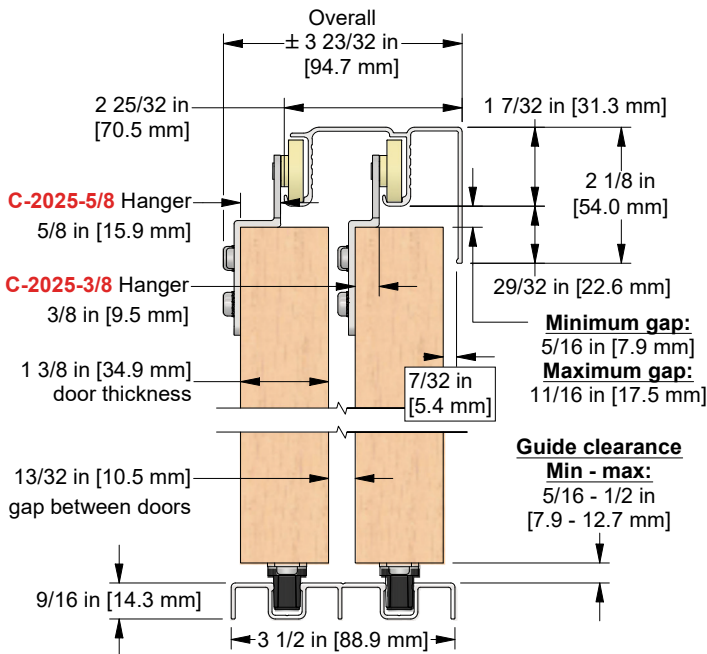

Installation
Instructions



Customer Name

Job No./Name

Date

Provided By

Notes