# C-500-B





### **FEATURES**

- 125 lbs. [56 kg] weight capacity
- Nylon wheels and precision ball bearings provide smooth and quiet door operation
- Adjustable in-track stops
- Cycle tested for up to 150,000 cycles without fail
- ADA Compliant (Barrier-free) design
- Anodized or powder-coated finishes also available
- For 1 3/4 in [44.5 mm] thick doors

### **COMPLETE 2 DOOR KIT BREAKDOWN**



### 1 - C-500 Double Track

x length based on kit size (e.g. 72 in [1829 mm] kit for 36 in [914 mm] wide door)



### 4 - C-400 Top Mount Hangers

complete with screws



### 4 - CDC-400 Catch/Stops

complete with screws



#### 2 - C-201 Aluminum Guide Channels

x length based on kit size (e.g. 36 in [914 mm] guide channel for 72 in [1829 mm] kit)



**Notes** 

### 1 - C-200D-134 Bypass Double Guide

for 1 3/4 in [44.5 mm] thick door applications, complete with screws

# **OPTIONAL**

**Door Locks & Pulls** 





#### **Add-On Products**



### C-519 Fascia x 1

x track length

### C-519 Fascia x 2


x track length

**Customer Name** Job No./Name **Date Provided By** 


# C-500-B




# **COMPLETE ELEVATION VIEW**

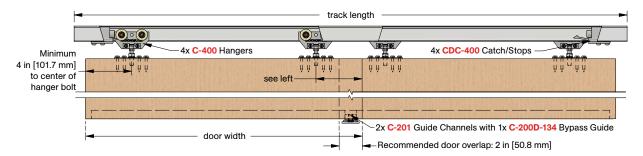

## PRODUCT DIMENSIONS

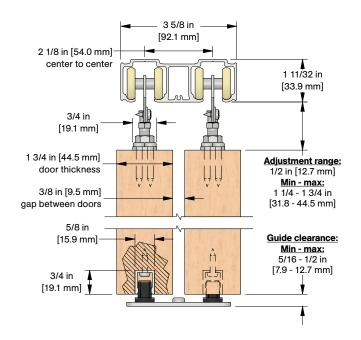

### Optional C-519 Snap-on Fascia, illustrated as solid black profile



Installation Instructions



Customer Name	Job No./Name	Date	Provided By

**Notes** 

