

# C-62L-SET Privacy Lockset




Installation Instructions

**Not to scale**

**Door Thickness:** 1 3/8 in [34.9 mm]\* to 1 3/4 in [44.5 mm] doors

For other door thicknesses, please contact Customer Service.


\*To use the C-60SE and C60ST Flush Pulls on a 1 3/8 in [34.9 mm] thick door, the thru-bolting post on each flush pull are supplied with a notch that allows for shortening its length for 1 3/8 in [34.9 mm] thick doors. Twist off or cut with hack saw.

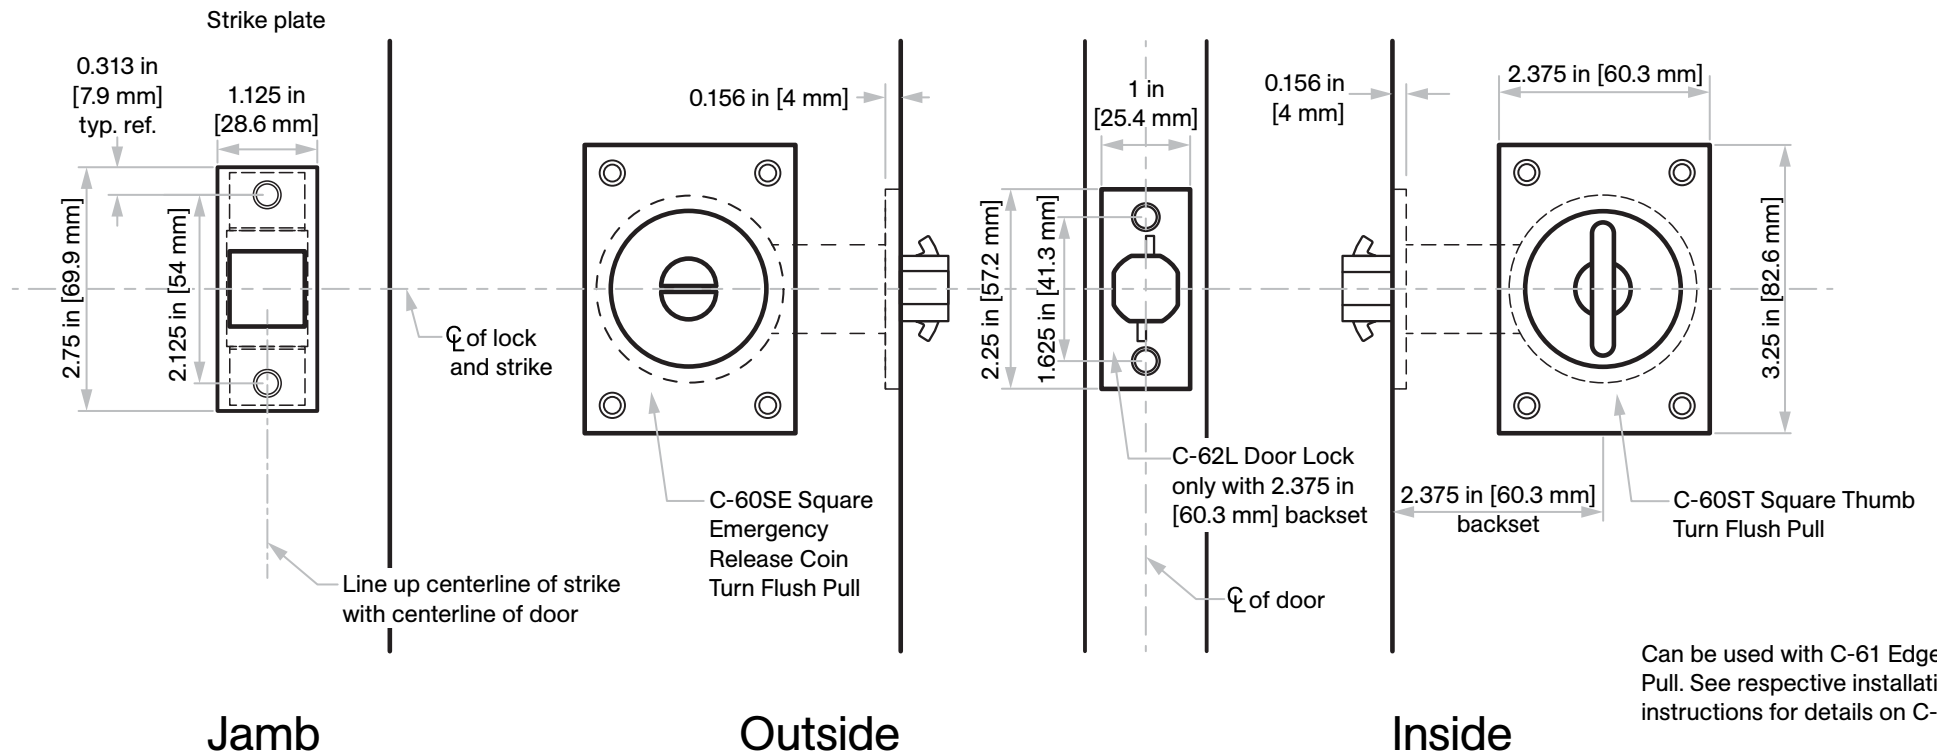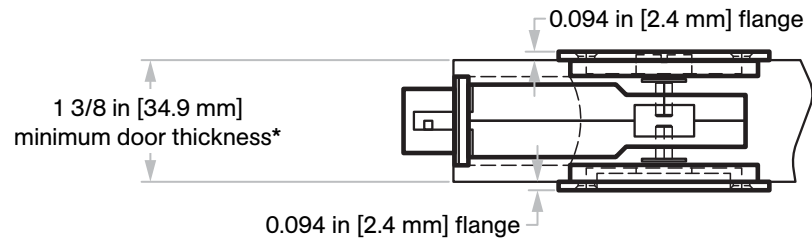

Can be used with C-61 Edge Pull. See respective installation instructions for details on C-61.

# Door Prep Template

Not to scale

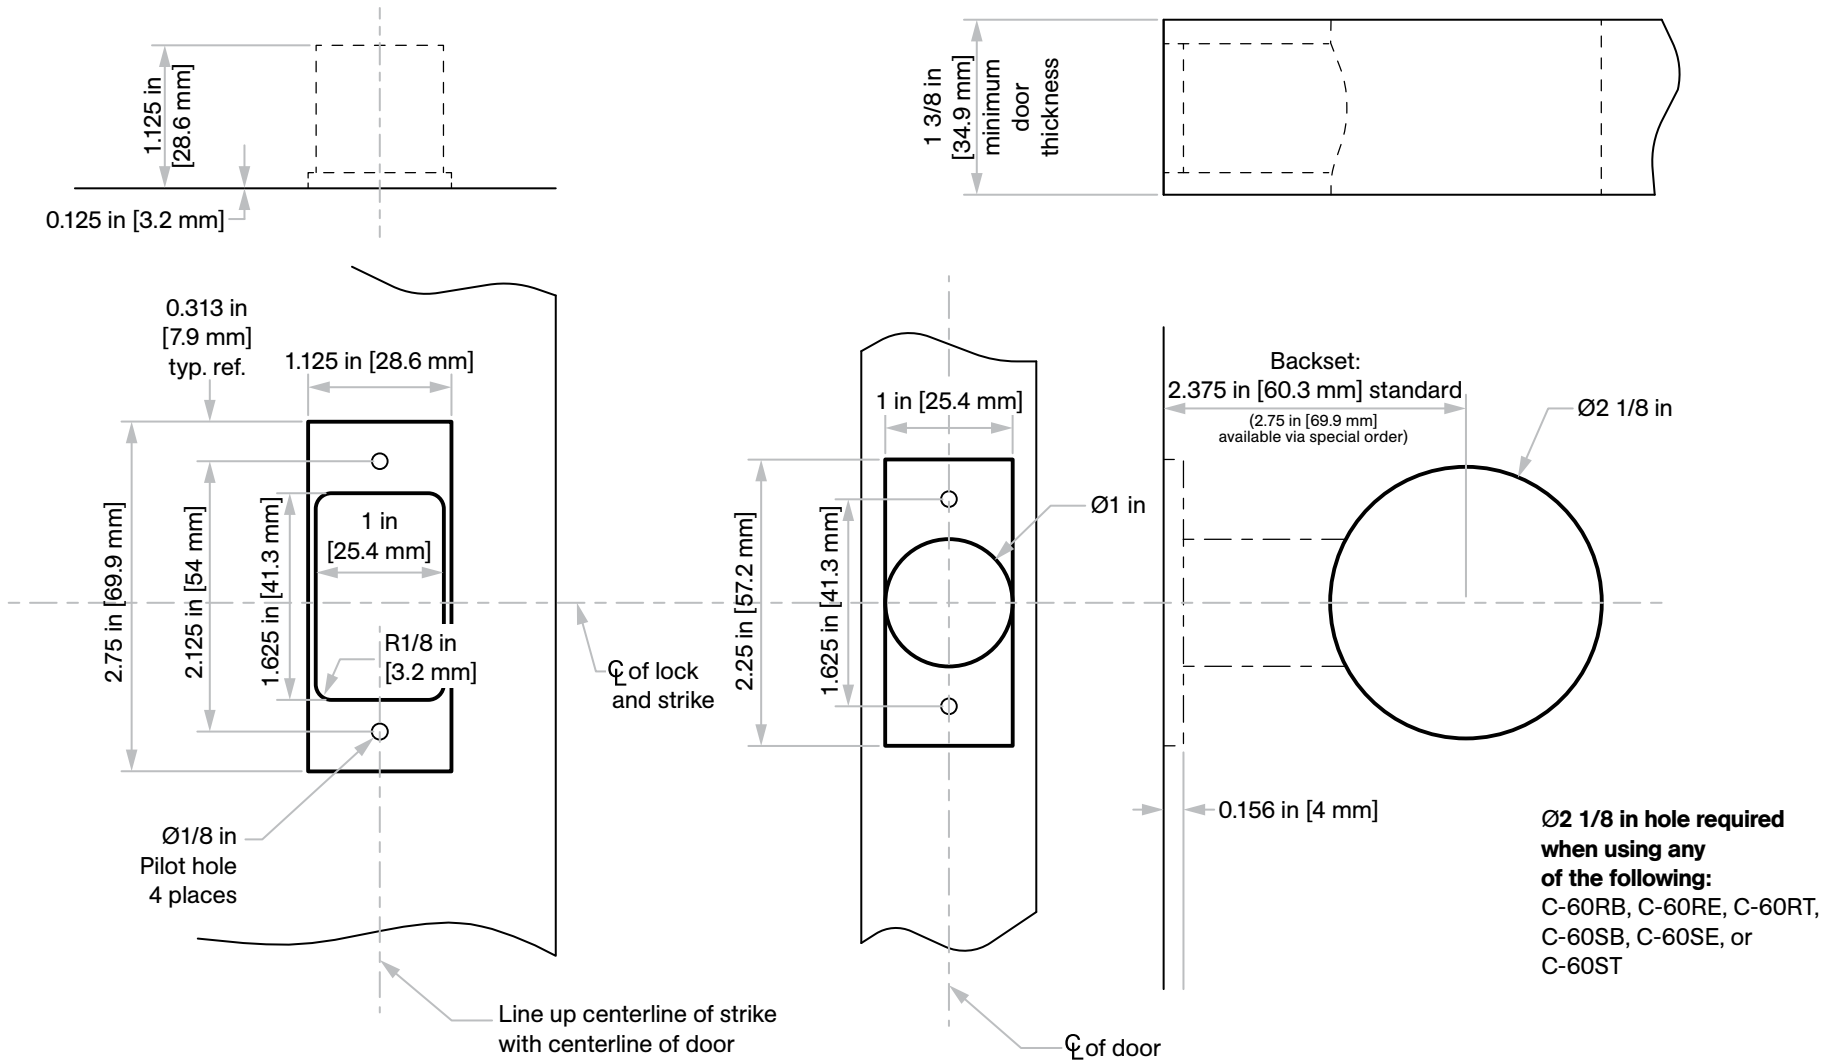

## Responsibility

Door and frame manufacturers are responsible for providing adequate construction or reinforcement for proper installation of hardware shown.

## Installation

Install C-62L Lock Body, strike plate, C-60SE, and C-60ST using twelve (12) #8 screws provided.