

C-90L-CT Security Lockset

Installation Instructions



Specifications

Case: Heavy gauge wrought

Armor Front: Brass, bronze, stainless

Dead Bolt: 1/2 in [12.7 mm] thick x 1 7/32 in [31 mm] high x 1 in [25.4 mm] throw

Pull: 1/2 in [12.7 mm] thick x 2 in [50.8 mm] high x 1 1/4 in [31.8 mm] throw

Thumb Turn Hub: 3/16 in [4.8 mm] on the diamond

Cam: See details on right

Door Thickness: 1 3/8 in [34.9 mm] to 2 1/4 in [57.2 mm]

Cam Required: B520-233


Dimensions

W = 1.000 in [25.4 mm]

X = 0.232 in [5.9 mm]




Y = 0.729 in [18.5 mm]

Z = 0.694 in [17.6 mm]




Not to scale

Included Components



Cylinder
1-5/32 in
Diameter hole
x 1 in Depth.
5-PIN Schlage
"C" Key Way
(will **not** sit flush
with door)

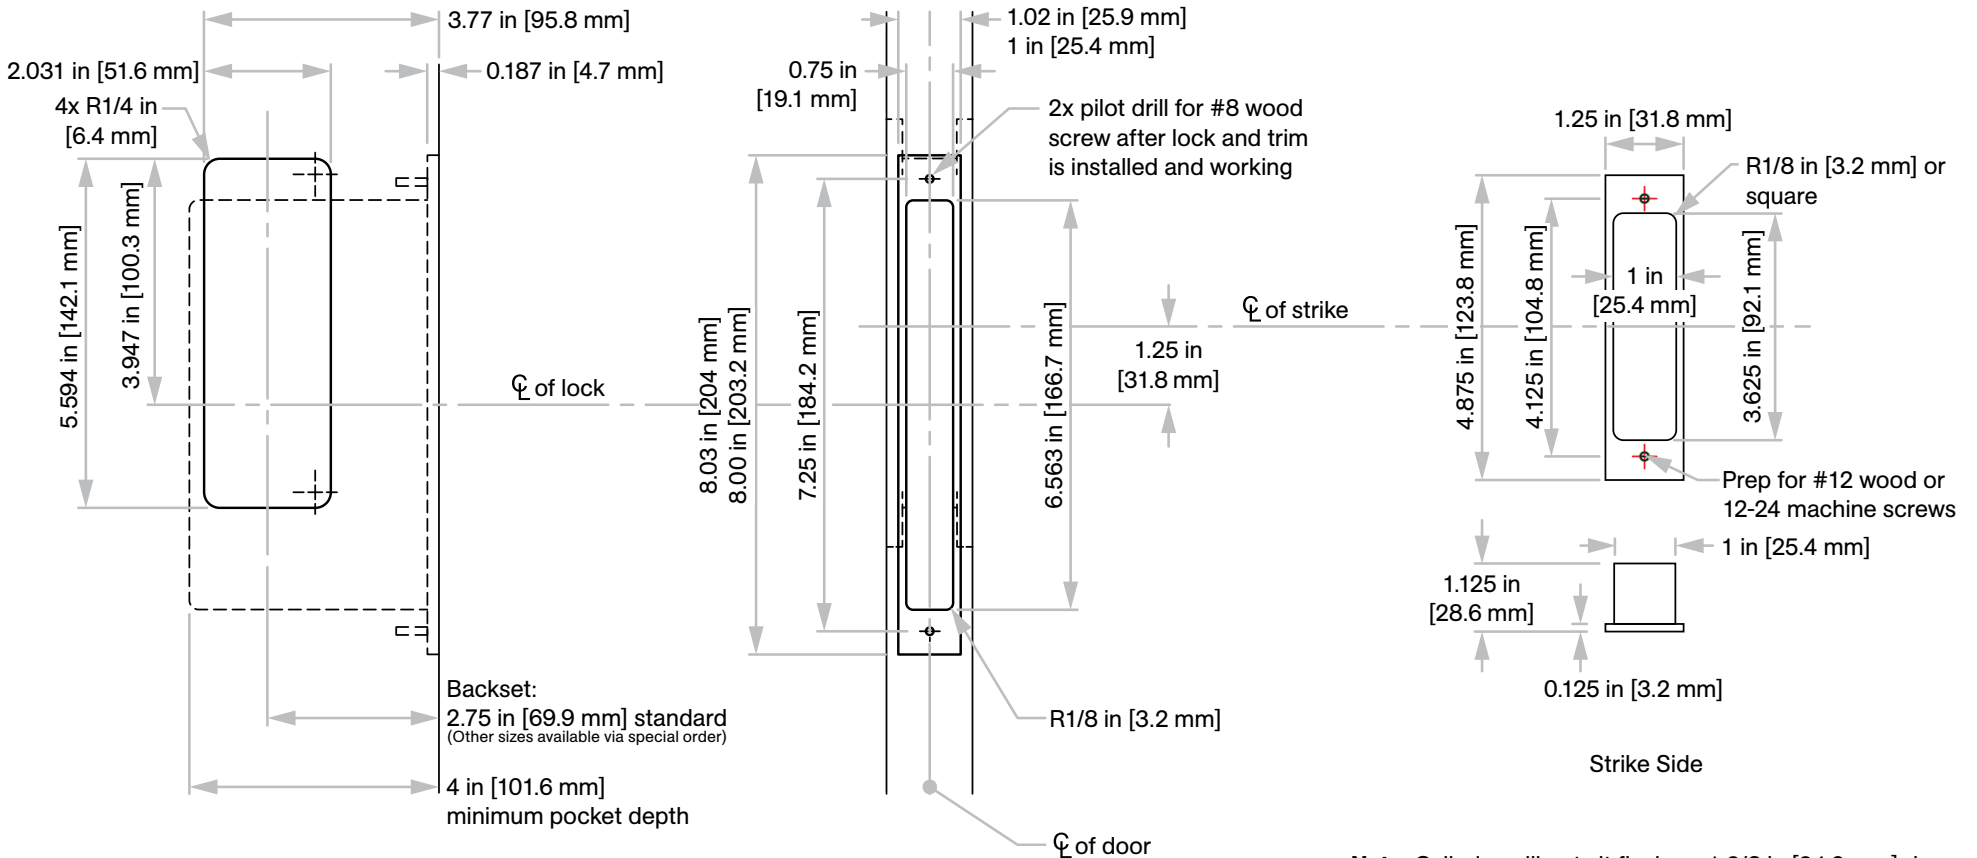

Note: Cylinder will not sit flush on 1 3/8 in [34.9 mm] doors