

# C-94BL-HLDP Privacy Barn Door Lockset and Pulls





Barrier-Free (ADA Compliant)

Installation Instructions

## Specifications

- Case:** Heavy gauge wrought
- Armor Front:** Brass, bronze, stainless
- Cam:** See details on right
- Door Thickness:** 1 3/4 in [44.5 mm]


## Included Components

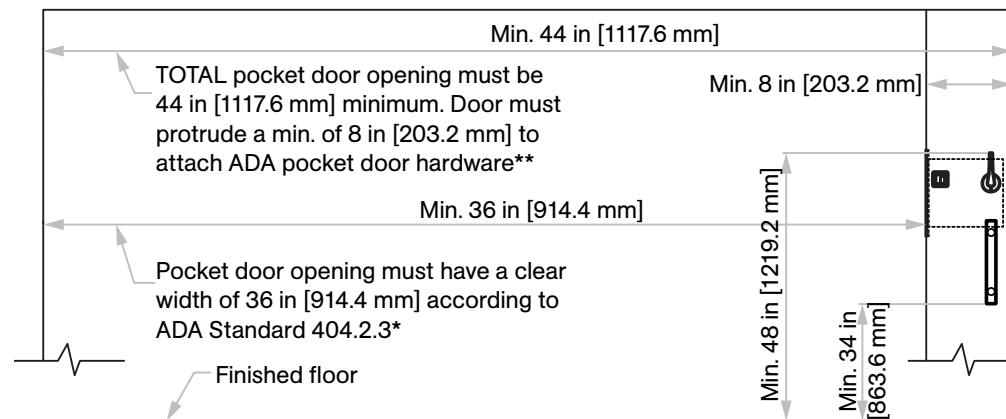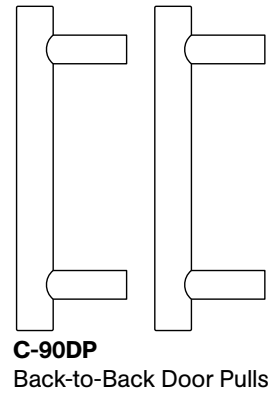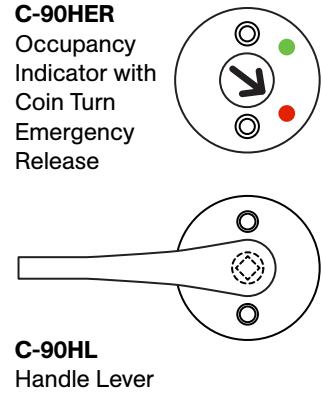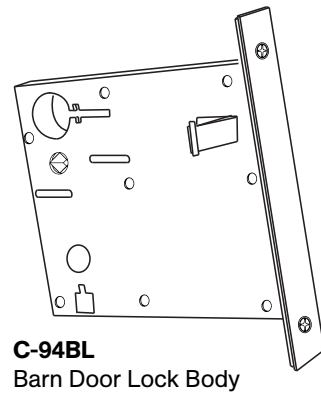

\*The ADA Standard 404.2.3\* is from the Dept. of Justice ADA Publication of Sept 15, 2010. KN Crowder encourages the end user to double check all state and federal standards for your particular project.

\*\*The total opening has to be 8 in [203.2 mm] minimum greater than the federal "clear width" dimension of 36 in [914.4 mm] to work properly.

\*\*\*The bottom of the C-90DP pulls must be installed 34 in [863.6 mm] from the finished floor. This will give 48 in [1219.2 mm] from the finished floor to the top of the C-90HL handle, thus meeting Code 404.2.7.

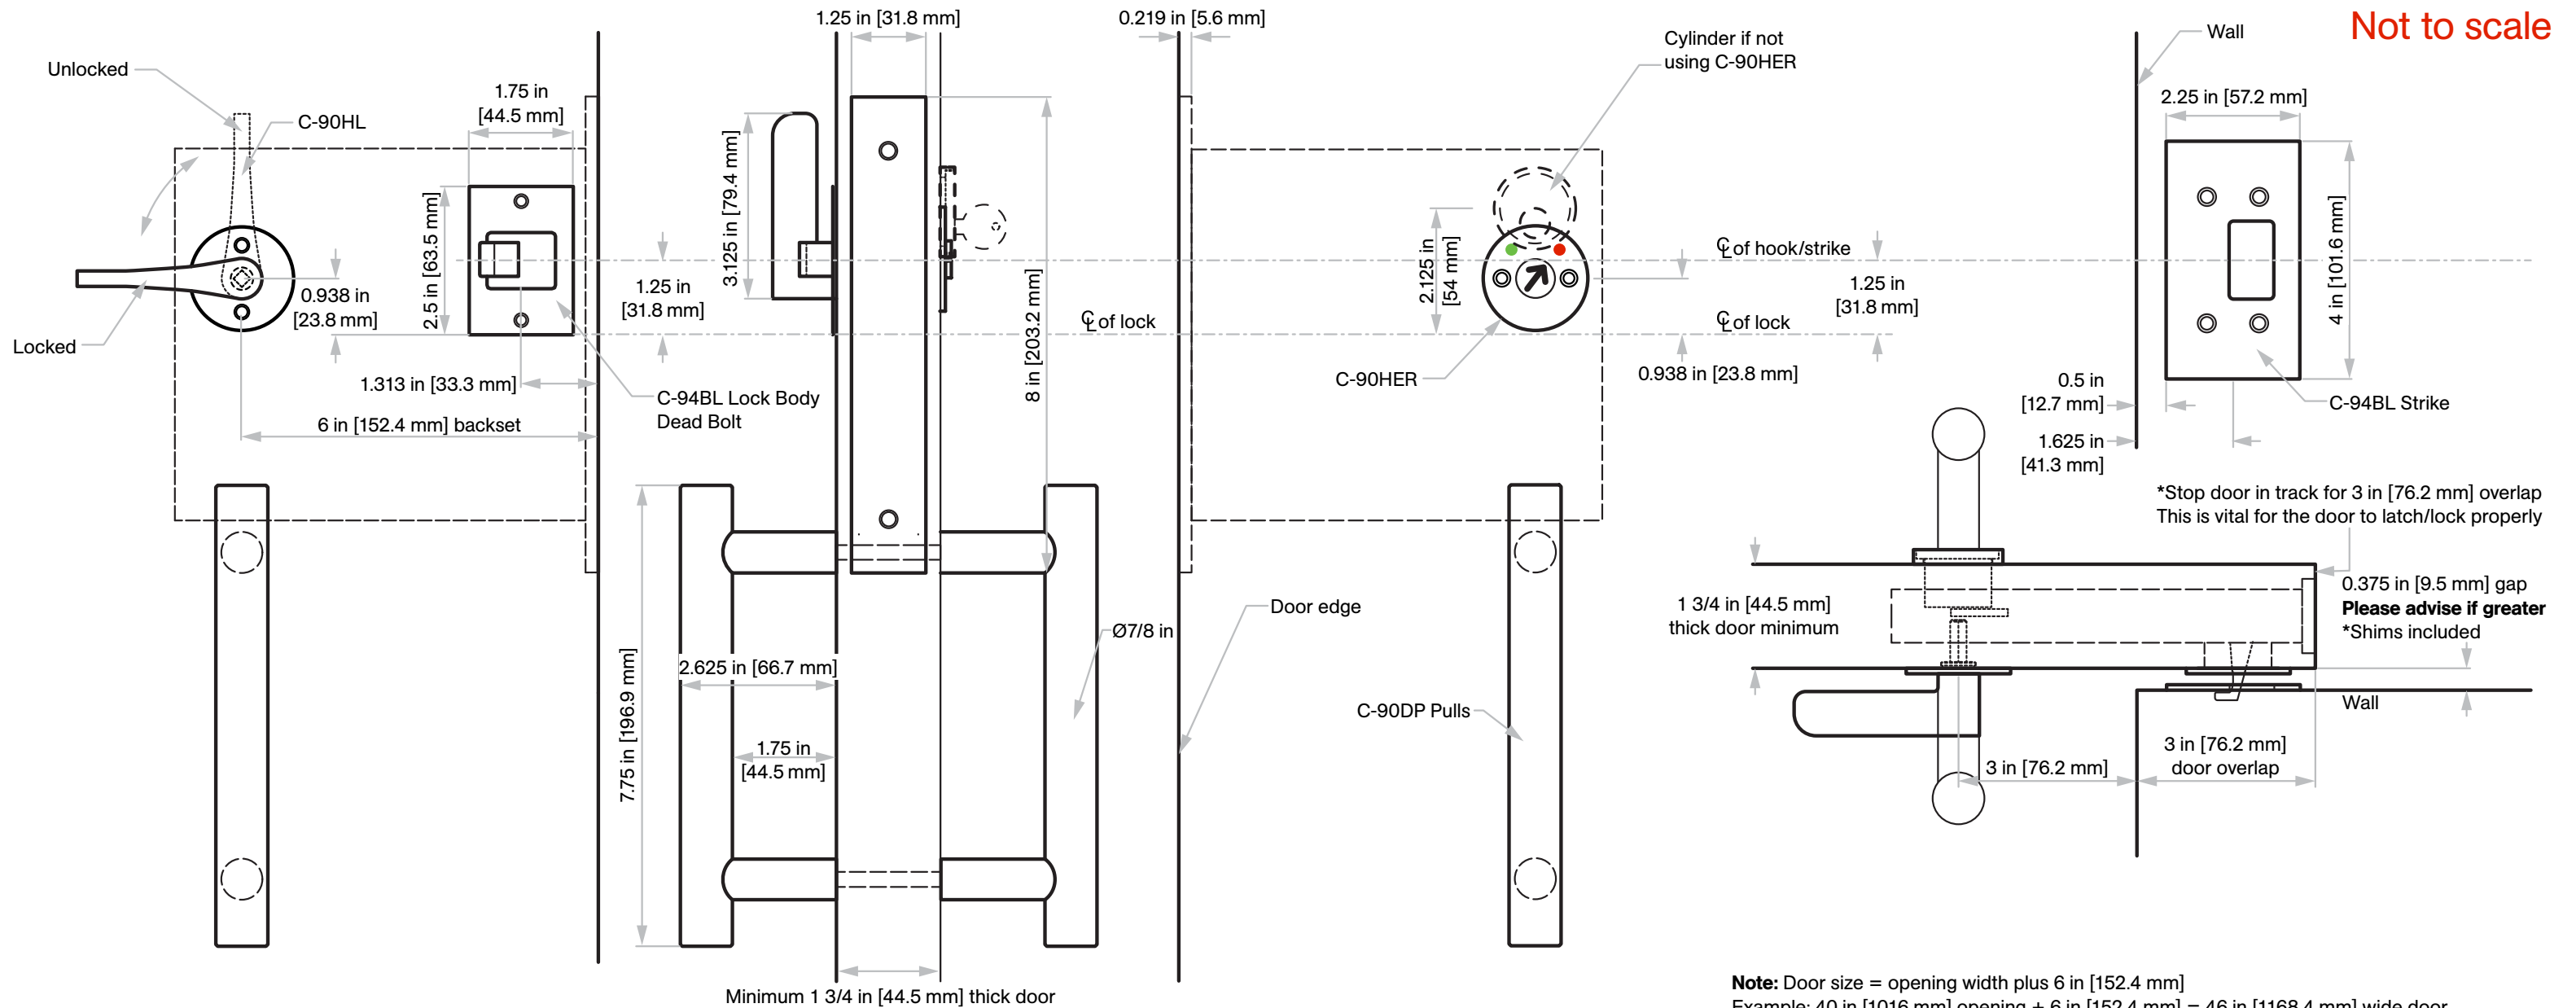


**Note:** Door size = opening width plus 6 in [152.4 mm]  
Example: 40 in [1016 mm] opening + 6 in [152.4 mm] = 46 in [1168.4 mm] wide door





# Strike Kit

Supplied Standard

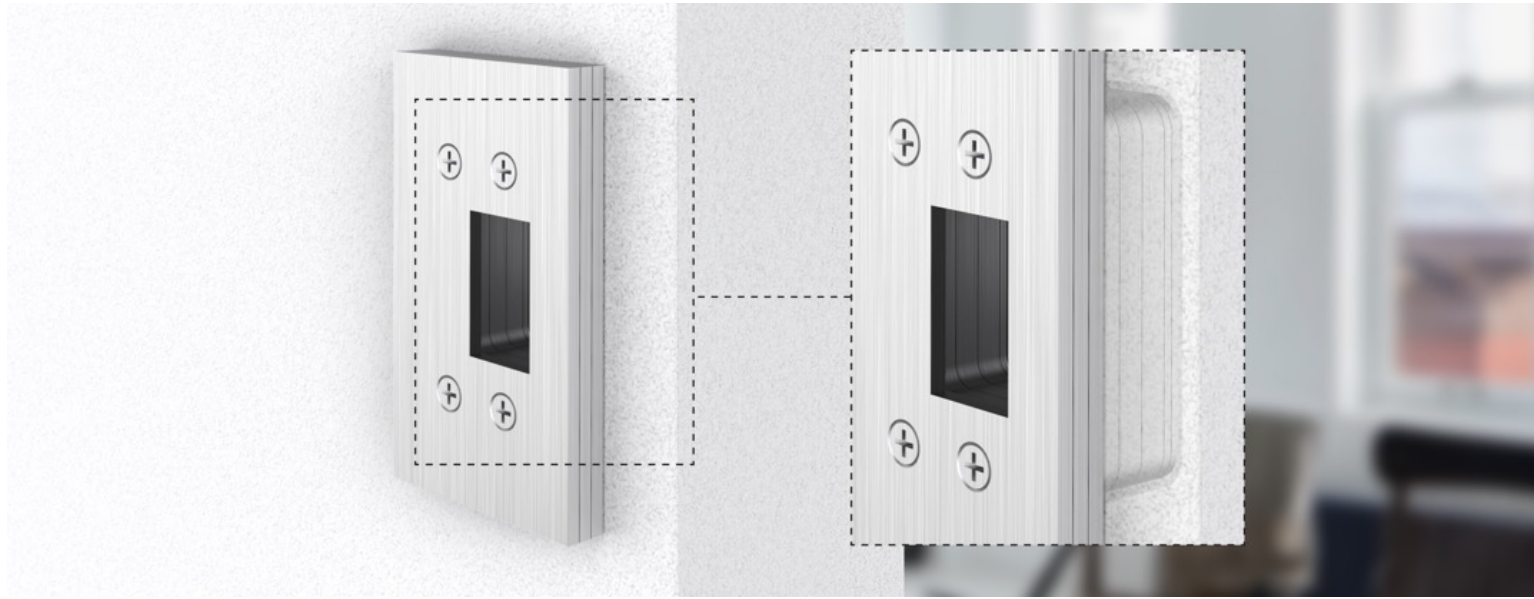

Not to scale

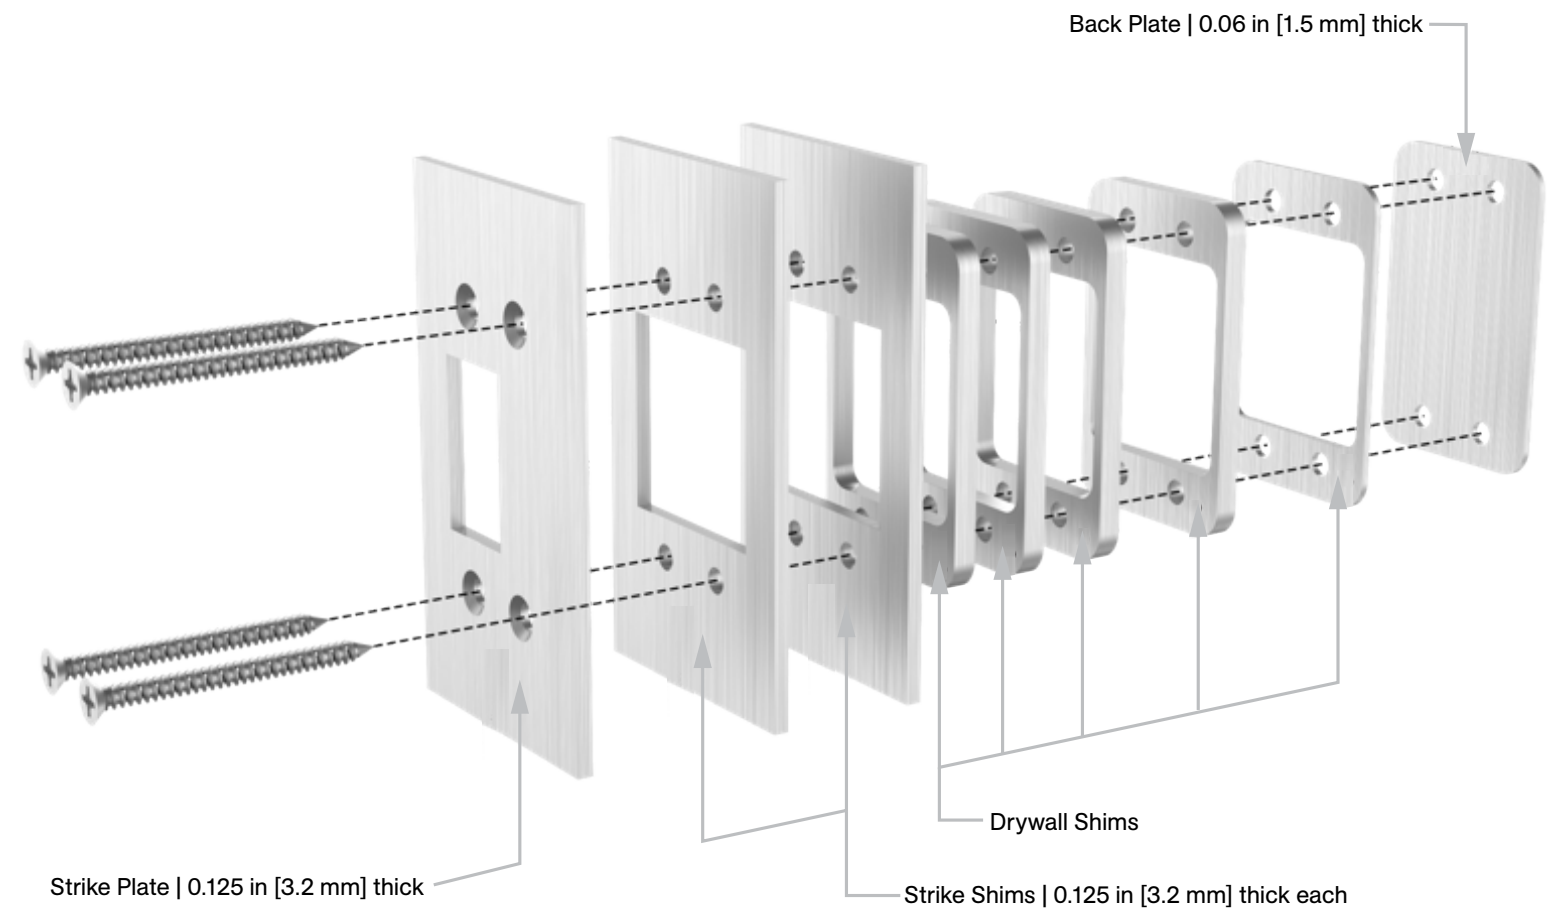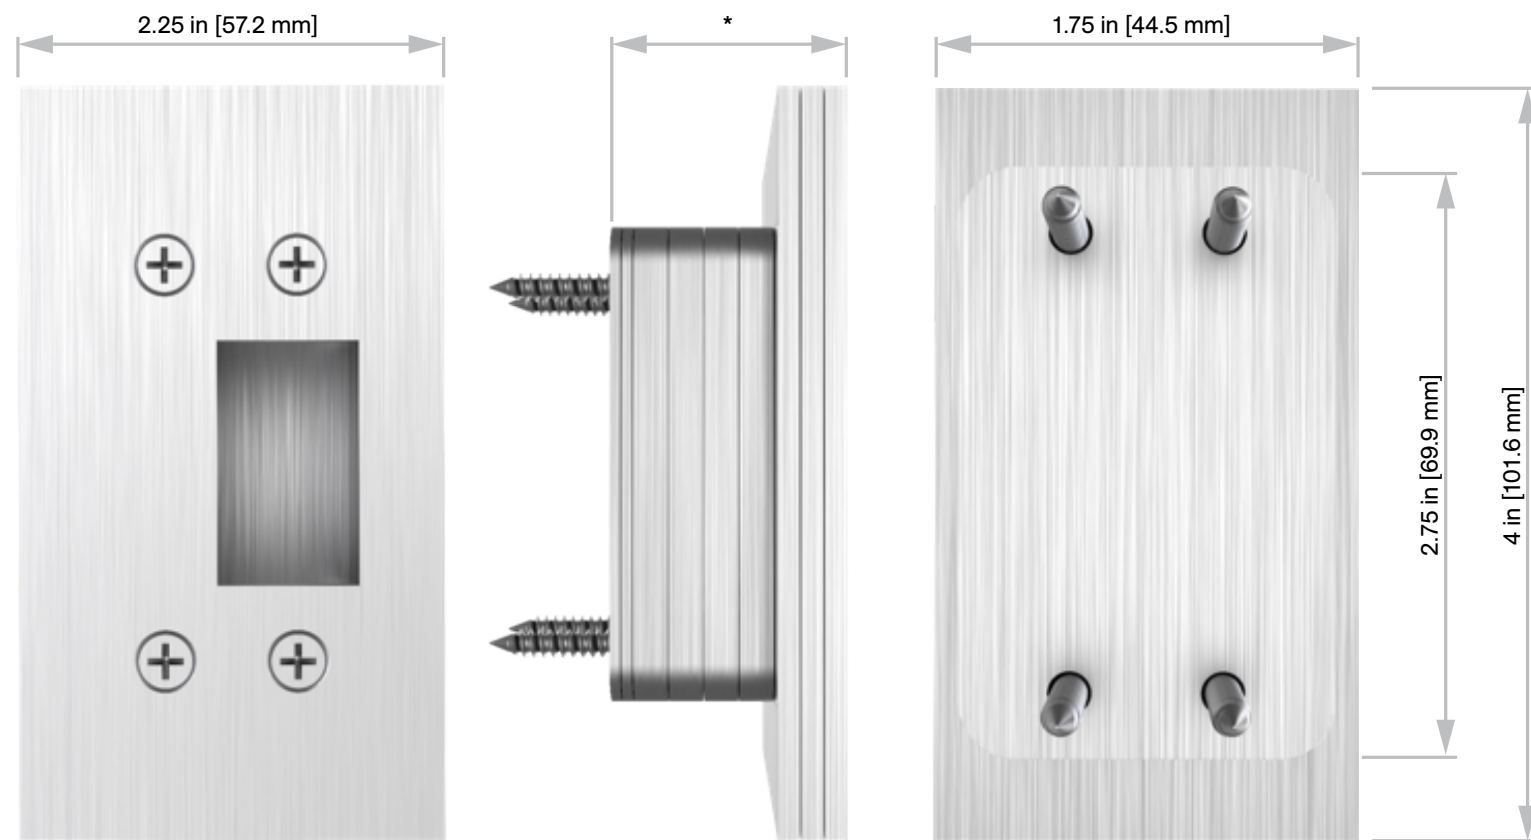

Number of drywall shims used is a function of drywall thickness.

Number of strike shims used is a function of the gap between the face of the door and the wall.