



## FEATURES

### Aluminum Door Louver

- Inverted “Y” Blades at 1 3/8 in [34.9 mm] intervals.
- Suitable for plastic laminated, wood and hollow metal doors
- Frame: 1 3/8 in [34.9 mm] front frame and 1 in [25.4 mm] back frame with mechanically joined corners.
- .062” thick 6063-T5 extruded aluminum
- Minimum size is 8 in [203.2 mm] x 8 in [203.2 mm]
- Maximum size is 48 in [1219.2 mm] x 90 in [2286 mm]
- 30% free area
- Available in mill finish, clear anodized, semi-gloss white powder-coat, semi-gloss black powder-coat, or custom powder-coated
- For 1 3/8 in [34.9 mm] to 1 3/4 in [44.5 mm] thick

## STANDARD SIZES

QTY	Width Inches	x	Height Inches	Width Inches	Height Inches
	12	X	7	12	7 1/8
	12	X	12	12	12 5/8
	14	X	10	14	9 7/8
	14	X	12	14	12 5/8
	16	X	12	16	12 5/8
	18	X	10	18	9 7/8
	18	X	12	18	12 5/8
	18	X	18	18	18 1/8
	20	X	12	20	12 5/8
	20	X	14	20	14
	20	X	15	20	15 3/8
	20	X	18	20	18 1/8

QTY	Width Inches	x	Height Inches	Width Inches	Height Inches
	20	X	20	20	19 1/2
	22	X	12	22	12 5/8
	22	X	15	22	15 3/8
	22	X	18	22	18 1/8
	24	X	12	24	12 5/8
	24	X	16	24	16 3/4
	24	X	18	24	18 1/8
	24	X	22	24	22 1/4
	24	X	24	24	24
	24	X	36	24	36
	26	X	18	26	18 1/8

## OPTIONAL

### Finish

- Mill finish
- Clear anodized
- Semi-gloss white power-coat
- Semi-gloss black power-coat
- Special order colours.
- Please provide colour chip.

### Fasteners

Security fasteners, please specify

### Screen

- Nylon insect screen
- black fibreglass screen with 18 x 16 mesh in aluminum frame
- Aluminum bird screen
- silver aluminum screen with 18 x 16 mesh in aluminum frame

### Custom Size

\_\_\_\_\_ quantity

\_\_\_\_\_ wide x \_\_\_\_\_ high

**(door cut out size equals order size)**


Customer Name

Job No./Name

Date

Provided By

Notes

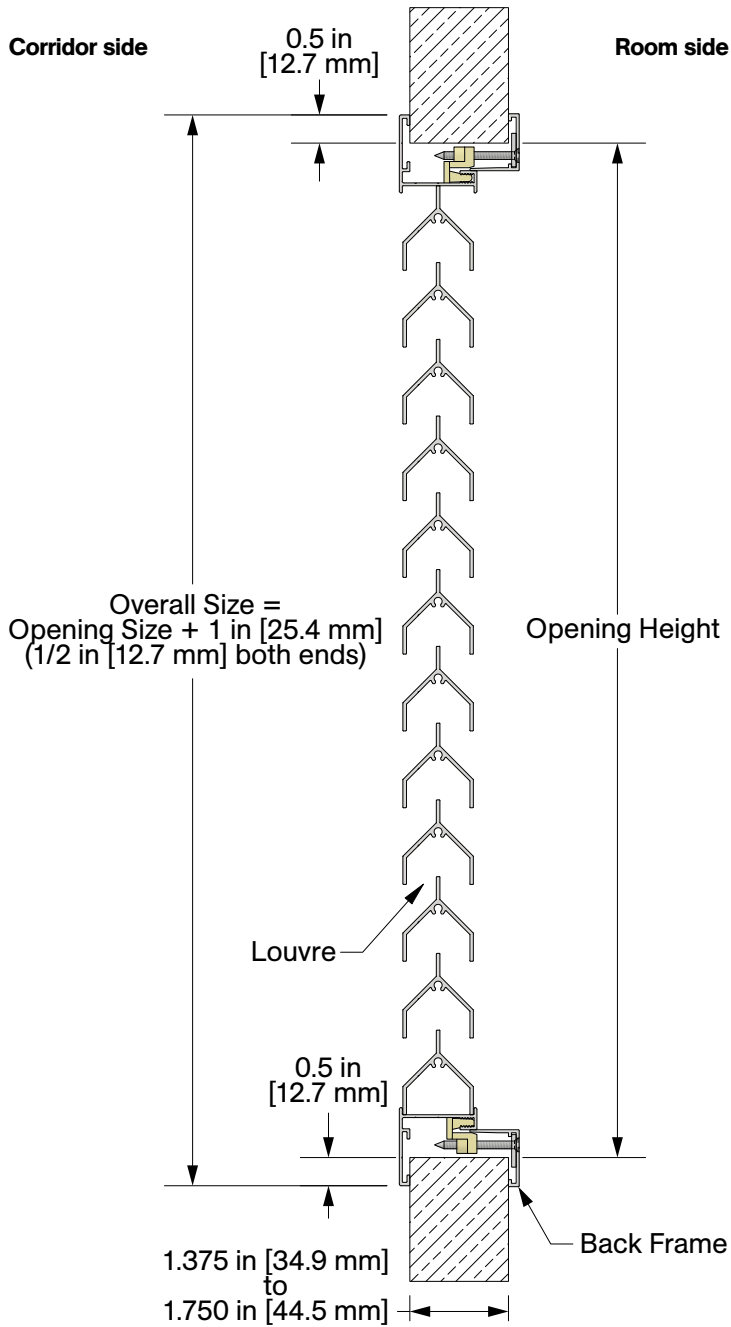

Customer Name

Job No./Name

Date

Provided By

Notes