

# CFT-FSP


## Back-to-Back Flat Bar Door Pull + Flush Pull Set

Installation Instructions


**Door Thickness:** 1 3/8 in [34.9 mm] to 1 3/4 in [44.5 mm]

With 2 in [50.8 mm] x 18 in [457.2 mm] flat bar door pull and 2 1/4 in [57.2 mm] x 15 in [381.0 mm] flush pull

### Product Dimension Details

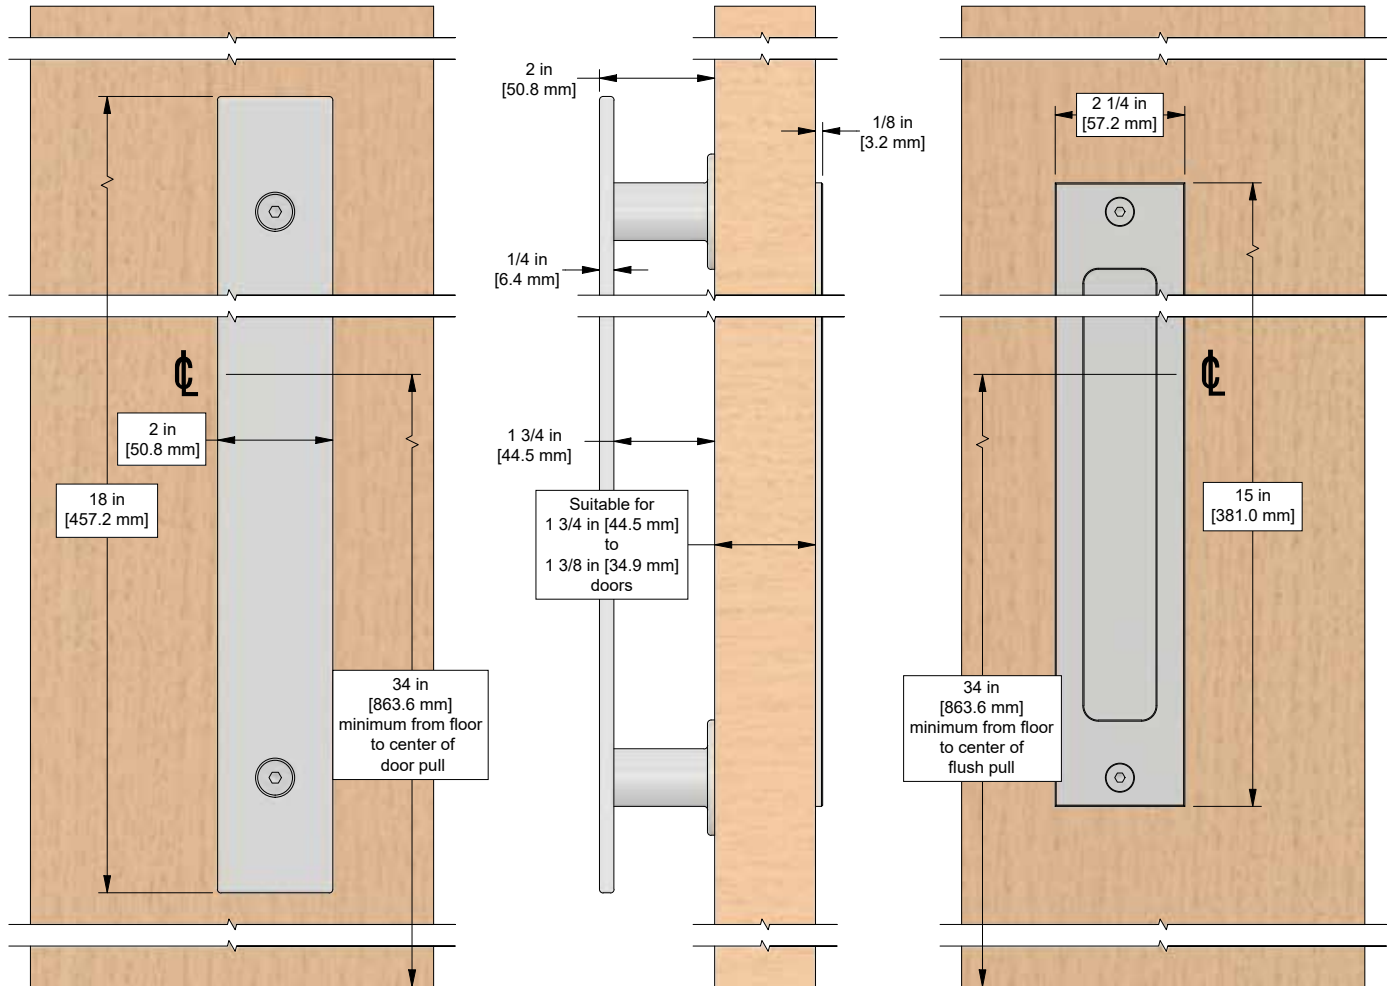


### Door Prep Details

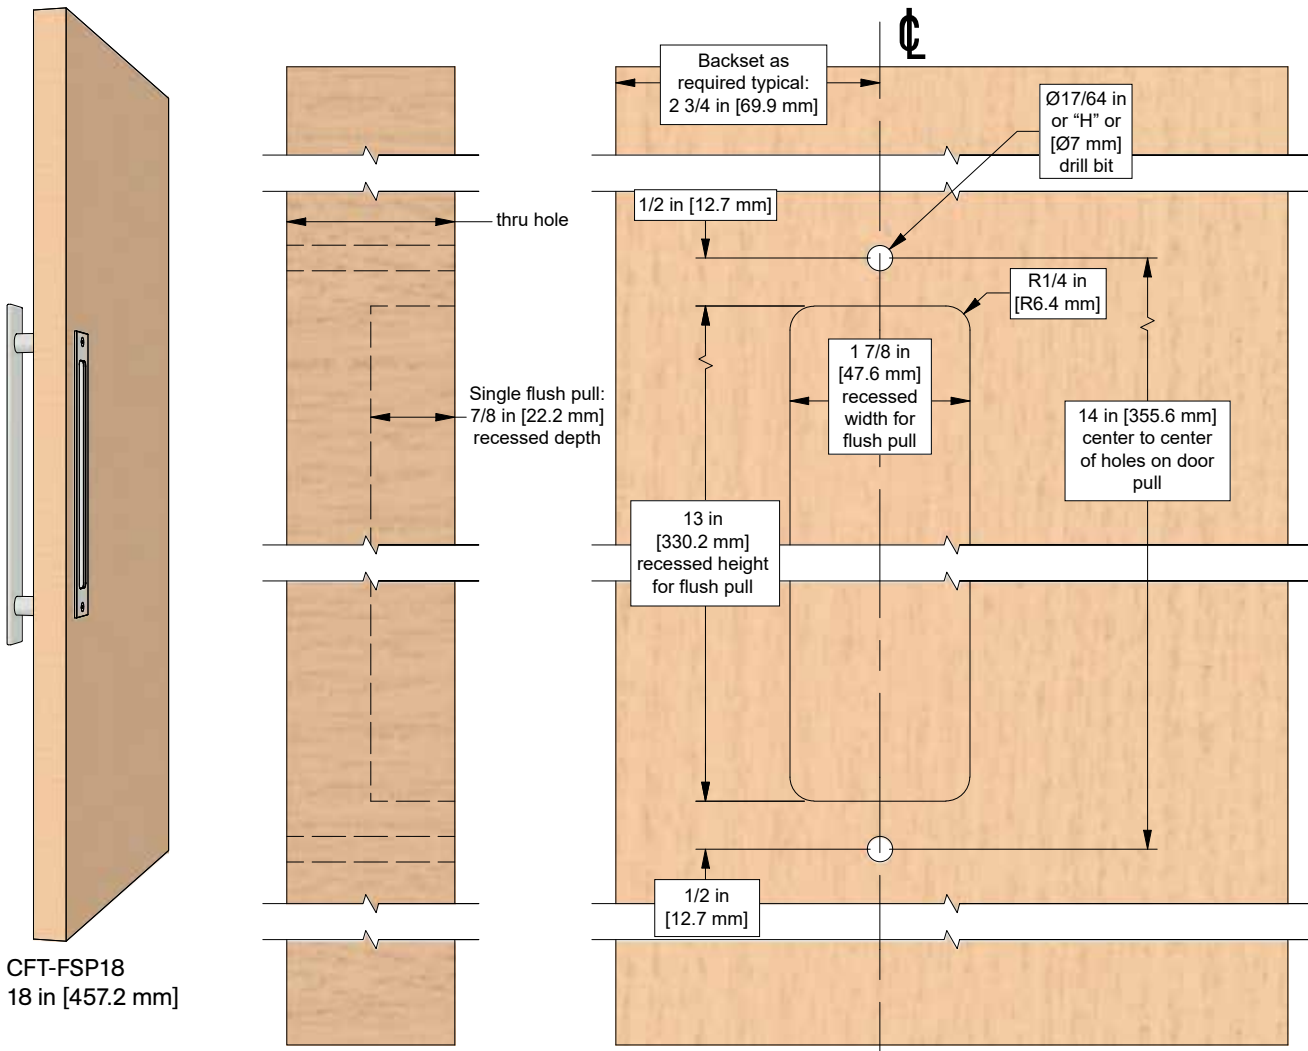


CFT-FSP18  
18 in [457.2 mm]

# Parts List

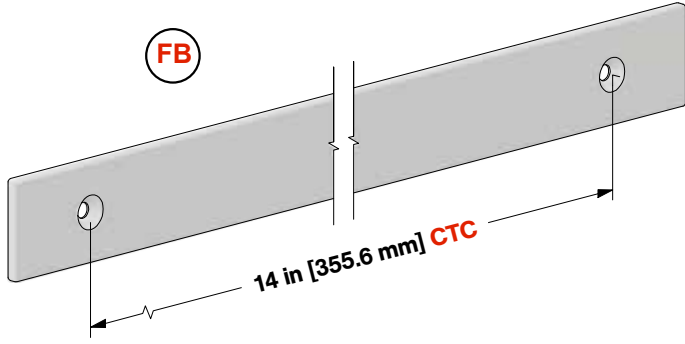

**CFT-FBDP Flat Bar Door Pull (1)**  
2 in [50.8 mm] x 18 in [457.2 mm] flat bar

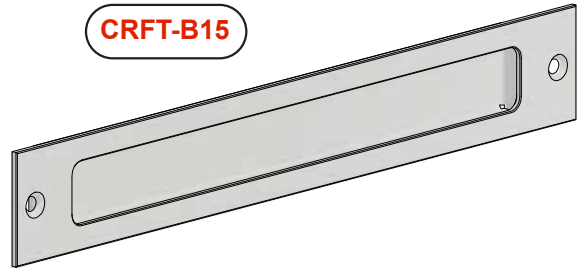

**CRFT-B15 (1)**  
2 1/4 in [57.2 mm] x 15 in [381.0 mm] flush pull




**FC**  
5/16-18 x 3/4" Flat Head Socket Cap Screw (2)



**FC212**  
1/4-20 x 2-1/2" Flat Head Socket Cap Screw (2)



**CRFT-FSPSCREW2**  
1/4-20 x 3" Flat Head Socket Cap Screw (2)  
**(optional add-on for doors greater than 1 3/4 in [44.5 mm] up to 2 1/4 in [57.2 mm] doors)**



**A**  
**CFT-DPB-A (2)**  
Door pull bracket Type A, threaded hole both ends

# Assembly

