


CRT-53-38-BP

KNC

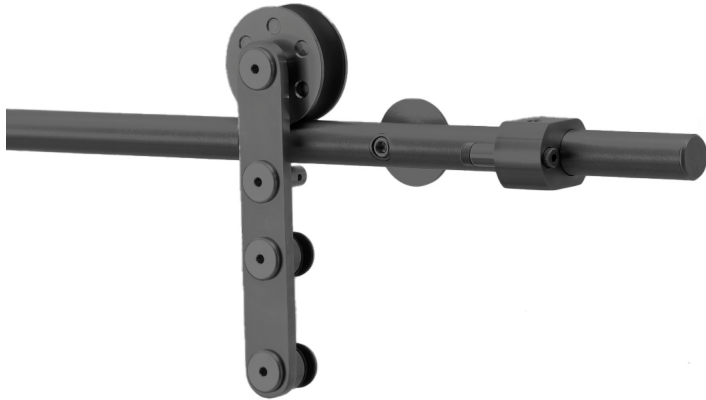

FEATURES

- 175 lbs. [79 kg] weight capacity
- Delrin wheels and precision ball bearings provide smooth and quiet door operation
- Adjustable in-track stops
- Cycle tested for up to 150,000 cycles without fail
- ADA Compliant (Barrier-free) design
- Also available in stainless steel (CRT-53-38-SS)
- For 3/8 in [10 mm] thick glass door

COMPLETE 1 DOOR KIT BREAKDOWN



1 - CRT-50-BP Round Track
x length based on kit size (e.g. 72 in [1829 mm] kit for 36 in [914 mm] wide door)



CRT-11-WB-BP Wall Mount Brackets
quantity dependent on track length
complete with 5/16-18 flat head socket lag screws and expansion shields



2 - CRT-53-38-BP Strap Mount Hangers
complete with anti-lift and custom mounting screws



2 - CRT-50-BP Shock Absorbing Stops
clamp around flat track



1 - CGGS-038-BP Stationary Glass Guide
complete with screws

OPTIONAL

Door Locks & Pulls



Notes:

Baseboard/trim thickness, if applicable

Customer Name

Job No./Name

Date

Provided By

Notes


KN Crowder

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
T. 1-866-999-1562 customerservice@kncrowder.com kncrowder.com
© 2020-2024 K.N. Crowder Mfg. Inc. All Rights Reserved.


CRT-53-38-BP



COMPLETE ELEVATION VIEW

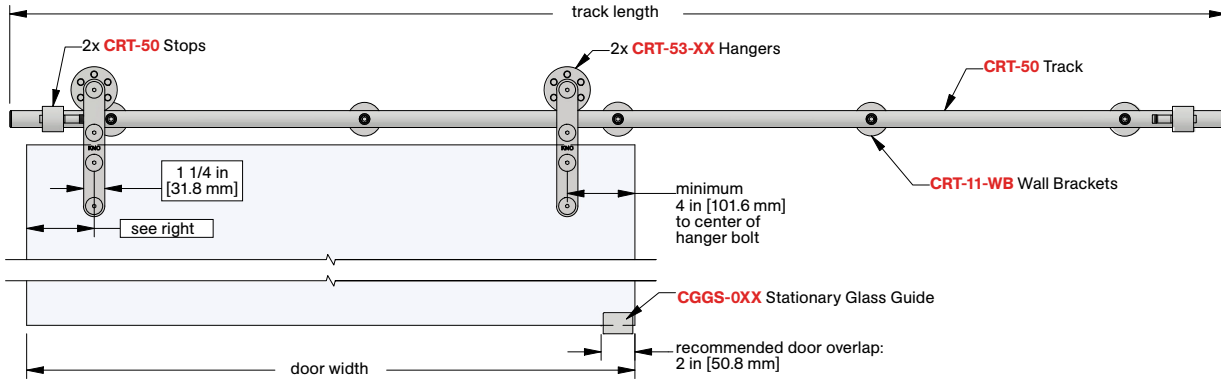

PRODUCT DIMENSIONS

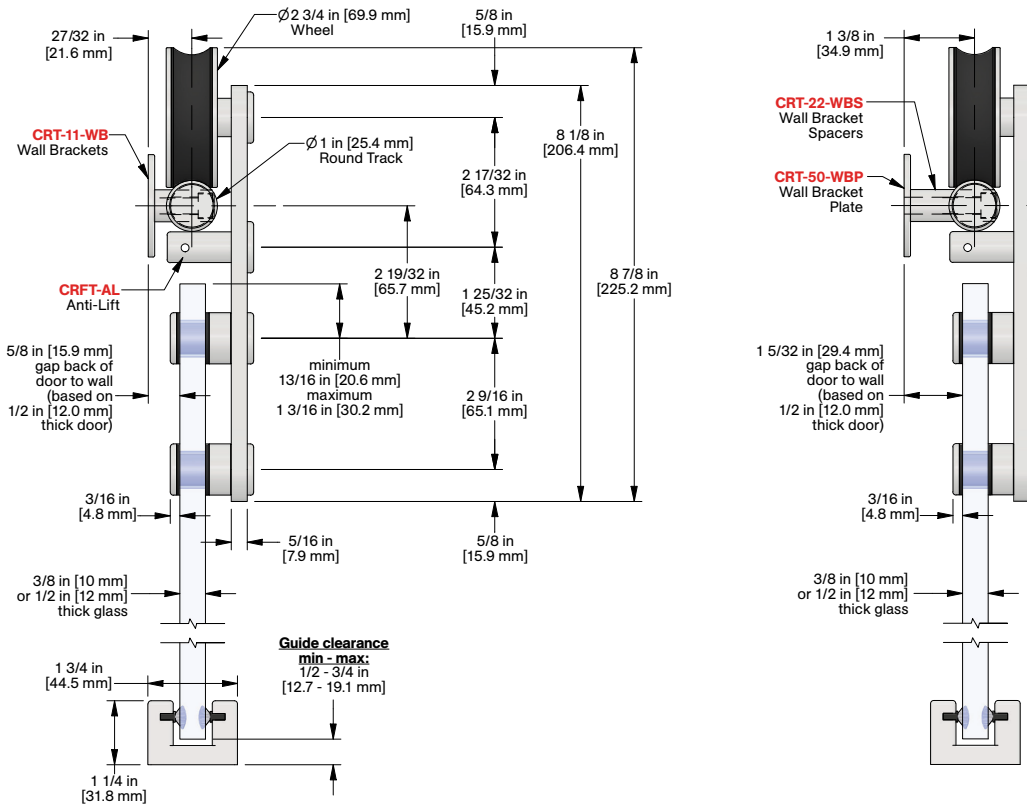

Installation Instructions



Customer Name

Job No./Name

Date

Provided By

Notes