


# CT-42N

NEW

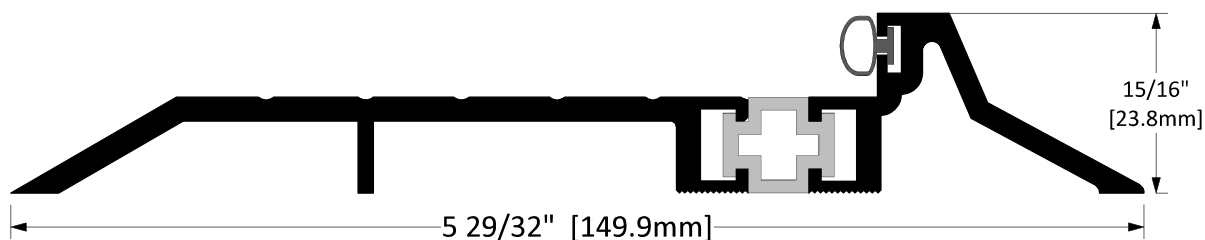

<b>Operation</b>	Thermal Break Threshold
<b>Features</b>	<ul style="list-style-type: none"> <li>• Mill Finish Extruded Aluminum with Neoprene</li> <li>• Insert included</li> </ul>
<b>Application</b>	<ul style="list-style-type: none"> <li>• Ideal for Residential, Commercial &amp; Industrial</li> </ul>

Customer Name: \_\_\_\_\_ Job No./Name: \_\_\_\_\_ Date: \_\_\_\_\_

Notes: \_\_\_\_\_

STD

## Finish Options

Mill Finish


Standard

## Screw Options




Screw Type: **G**  
 3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey  
 Phillips Drive, Concrete Screws  
 (5/32" Pre-Drill Required)

Optional



Screw Type: **H**  
 #10 X 1-3/4" Stainless Steel Flat Head,  
 Robertson Drive, Type A Screws  
 (Complete With Nylon Anchor)



Screw Type: **I**  
 #10 X 2" Stainless Steel Flat  
 Head, Tamper-Resistant Torx  
 Drive, Type A Screws  
 (Complete With Nylon Anchor)

Provided By: \_\_\_\_\_