


CT-43N

NEW

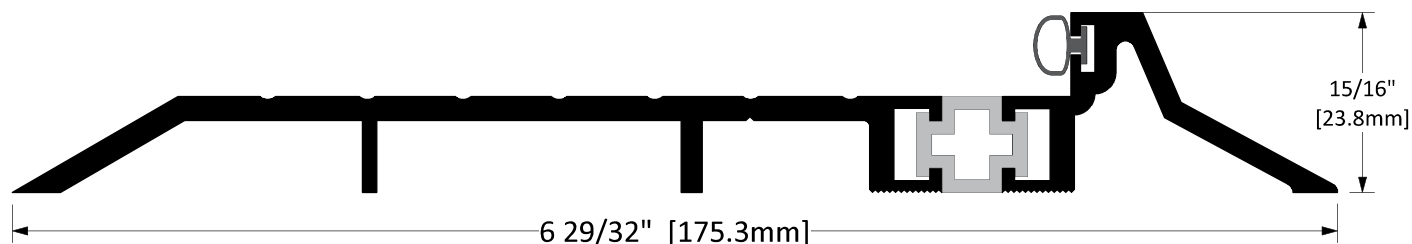

STD

Finish Options

Mill Finish


Standard

Screw Options




Screw Type: **G**
 3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey
 Phillips Drive, Concrete Screws
 (5/32" Pre-Drill Required)

Optional



Screw Type: **H**
 #10 X 1-3/4" Stainless Steel Flat Head,
 Robertson Drive, Type A Screws
 (Complete With Nylon Anchor)



Screw Type: **I**
 #10 X 2" Stainless Steel Flat
 Head, Tamper-Resistant Torx
 Drive, Type A Screws
 (Complete With Nylon Anchor)

| | |
|--------------------|--|
| Operation | Thermal Break Threshold |
| Features | <ul style="list-style-type: none"> • Mill Finish Extruded Aluminum with Neoprene • Insert included |
| Application | <ul style="list-style-type: none"> • Ideal for Residential, Commercial & Industrial |

Customer Name:

Job No./Name:

Date:

Provided By:

Notes: