


CT-72N



STD

FINISHES

Mill Finish

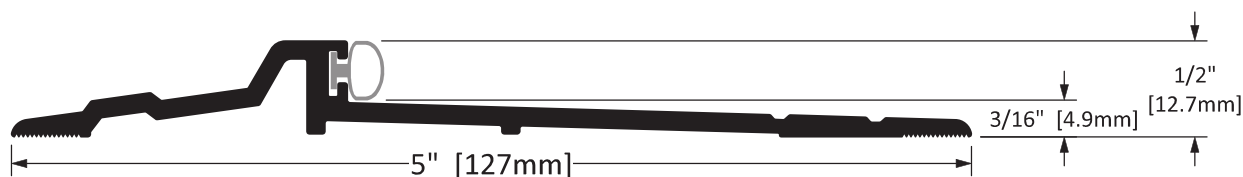


SCREW OPTIONS

Standard




Screw Type: **G**
 3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey
 Phillips Drive, Concrete Screws
 (5/32" Pre-Drill Required)

Optional



Screw Type: **H**
 #10 X 1-3/4" Stainless Steel Flat Head,
 Robertson Drive, Type A Screws
 (Complete With Nylon Anchor)



Screw Type: **I**
 #10 X 2" Stainless Steel Flat
 Head, Tamper-Resistant Torx
 Drive, Type A Screws
 (Complete With Nylon Anchor)

Operation	Seal Threshold
Features	Mill Finish Extruded Aluminum with Neoprene
Application	Ideal for Residential, Commercial & Industrial

Customer Name	Job No./Name	Date	Provided By
----------------------	---------------------	-------------	--------------------

Notes