

# Crowder Cantilever

## Application Form

Job \_\_\_\_\_


Company \_\_\_\_\_

Address \_\_\_\_\_


Name \_\_\_\_\_ Phone \_\_\_\_\_

Email \_\_\_\_\_

### Elevation View

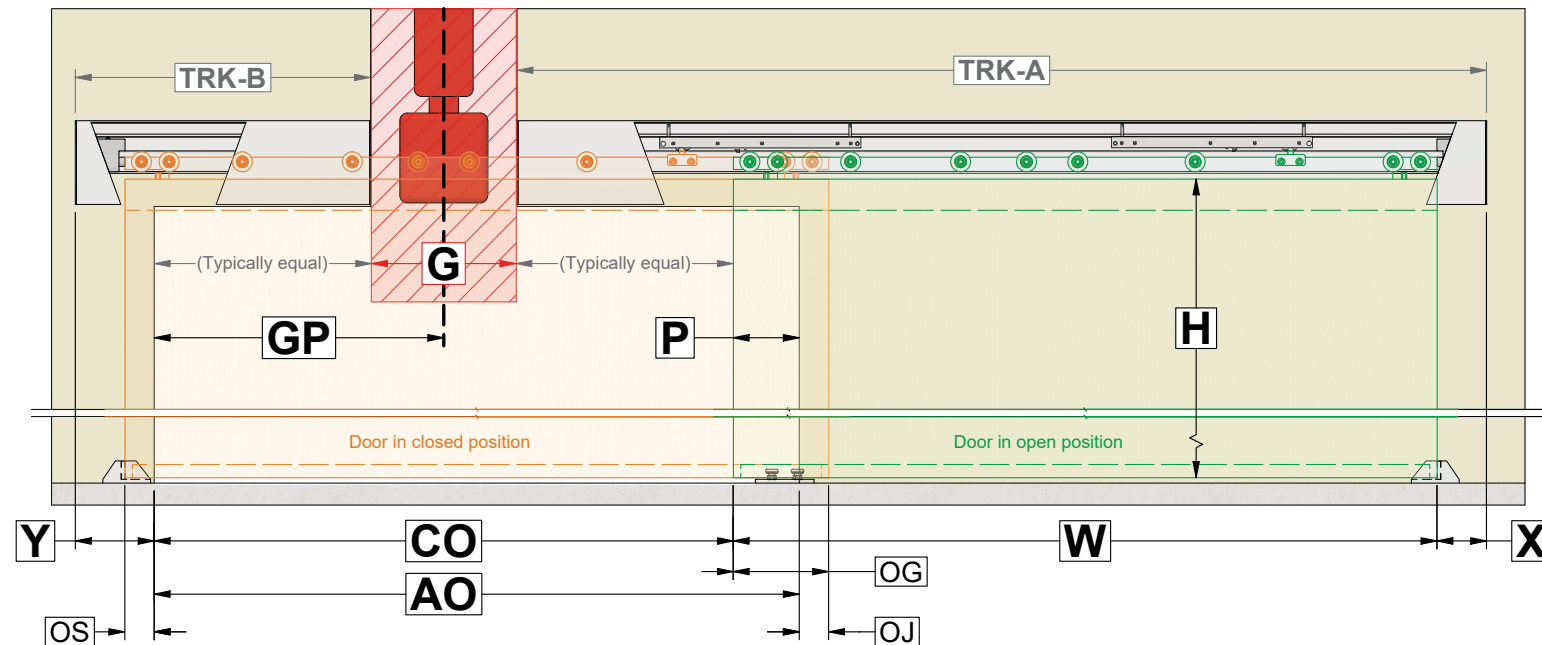

### Plan View

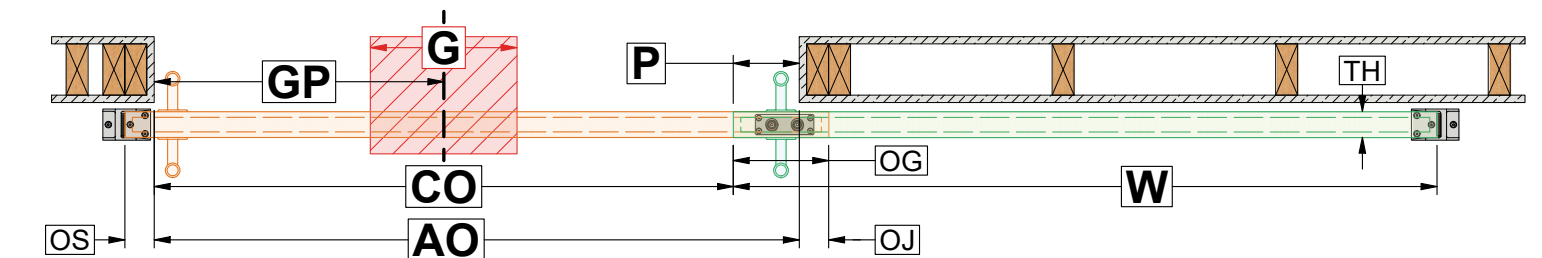

### Door Details

Door width [W] \_\_\_\_\_

Recommended to be at least 4 in [101.6 mm] wider than finished actual opening [AO] to overlap walls by 2 in [50.8 mm] on each side. Door must be minimum three times (3x) gap [G] dimension + 2 in [50.8 mm].

Door height [H] \_\_\_\_\_

Door thickness [TH] \_\_\_\_\_

Minimum: 1 3/4 in [45 mm]

Door weight \_\_\_\_\_ lbs

Maximum: 300 lbs [136 kg] kg

### Track System

How will the track be mounted?

Wall (Barn/Side) Mount  Top Mount

If side mount, select fascia style:

Square Fascia  Sloped Fascia

Catch 'N' Close?

Catch 'N' Close  No Catch 'N' Close

### Overlaps

With door in closed position

Door overlap at strike side of opening [OS] \_\_\_\_\_

Recommended minimum 2 in [50.8 mm].

Door overlap at jamb side of opening [OJ] \_\_\_\_\_

Recommended minimum 2 in [50.8 mm].

Door overlap on guide system [OG] \_\_\_\_\_

Minimum 4 in [101.6 mm]. Typically, door protrusion [P] dimension + door overlap at jamb side [OJ] dimension.

### Additional Notes

Please forward any elevation and plan view drawings you have available for this application.

### Opening Details


Number of openings \_\_\_\_\_

If multiple handings and/or door sizes on project, please submit one application form per unique opening.


Door handing

If handing is unknown at time of submitting application request, default handing will be RHO as shown in detailed drawings.

Right Hand Outside [RHO]

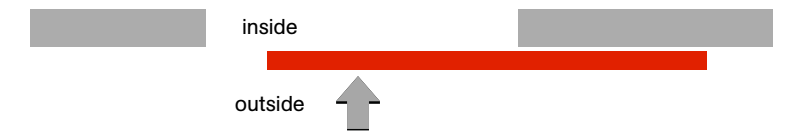


Left Hand Outside [LHO]

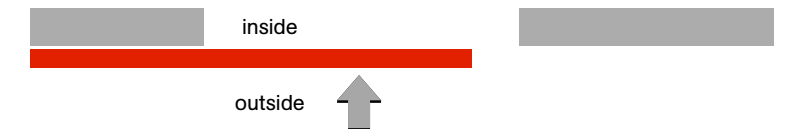

Right Hand Inside [RHI]



Left Hand Inside [LHI]

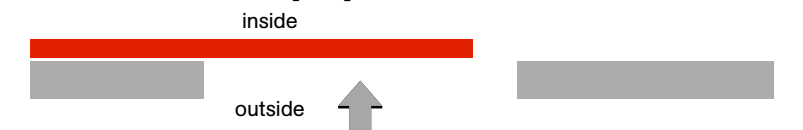

Clear opening [CO] \_\_\_\_\_

What is the clear opening width from leading edge of door to finished strike side?

Door protrusion [P] \_\_\_\_\_

Does the door clear the opening or will it protrude into the opening due to barrier-free lockset or handle pulls? If the door will protrude, the recommended minimum protrusion is 4 1/2 in [114.3 mm].

Actual opening [AO] \_\_\_\_\_

Typically, clear opening [CO] dimension + door protrusion [P] dimension.

Gap [G] \_\_\_\_\_

Maximum gap allowed is 16 in [406.4 mm].

Gap centerline position [GP] \_\_\_\_\_

Typically, gap is located in center of clear opening [CO], if not, dimension is taken from strike side of clear opening.

Are there any wall space restrictions?

No

Yes

**KN Crowder**

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3  
T. 1-866-999-1562 customerservice@kncrowder.com kncrowder.com  
© 2020-2024 K.N. Crowder Mfg. Inc. All Rights Reserved.

This drawing is the property of K.N. Crowder Mfg. Inc. and is subject to return upon demand.  
It must not be traced, copied, or reproduced in any manner, nor submitted to any outside parties for examination without our consent.