

# Crowder Cantilever

## Application Form

Job \_\_\_\_\_

Company \_\_\_\_\_


Address \_\_\_\_\_

Name \_\_\_\_\_ Phone \_\_\_\_\_

Email \_\_\_\_\_


### Elevation View

Note: Details are shown as **Right-hand Outside [RHO]** opening format

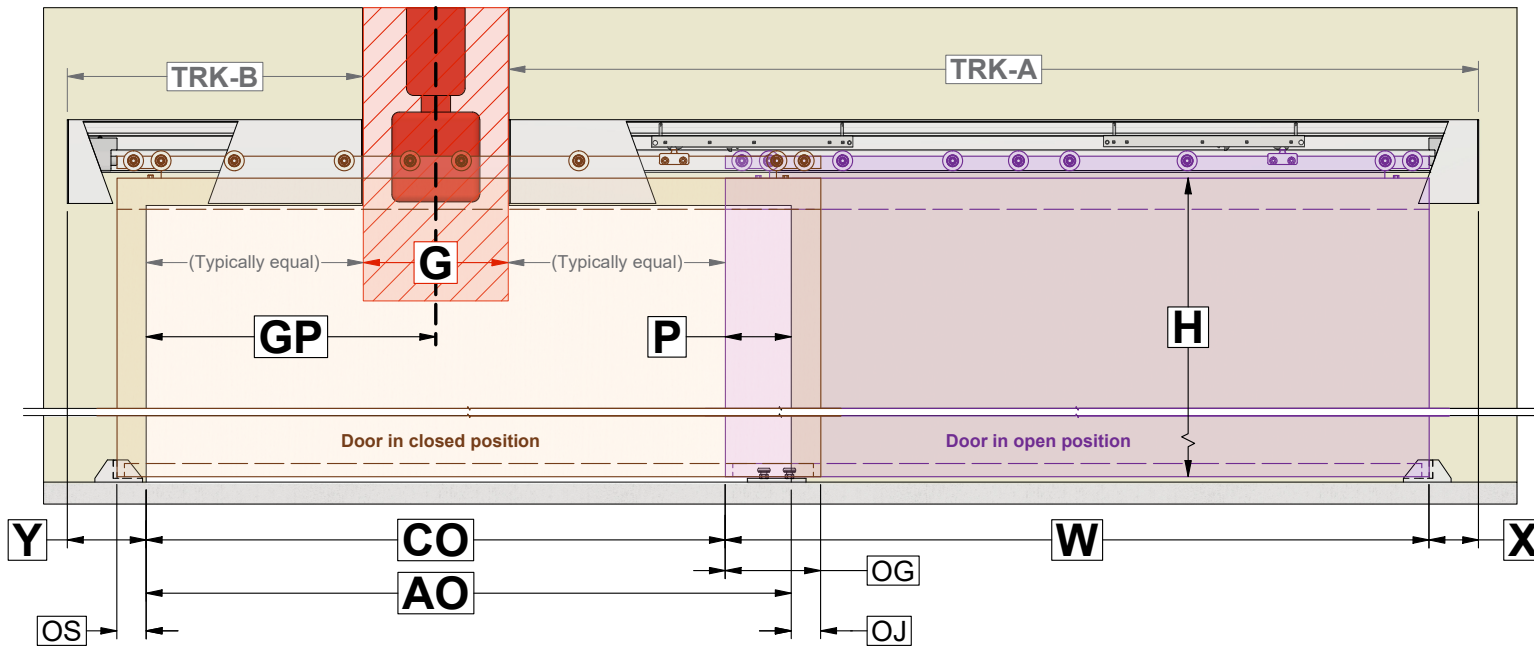

### Plan View

Note: Details are shown as **Right-hand Outside [RHO]** opening format

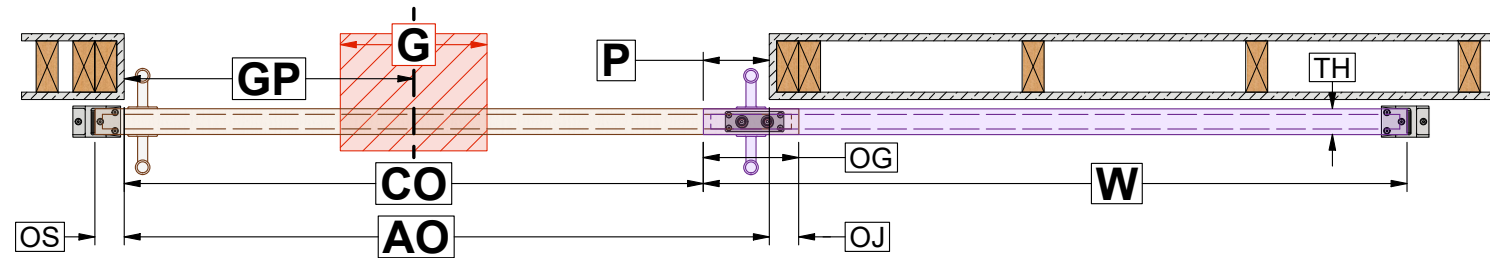

### Door Details

**Door width [W]** \_\_\_\_\_  
 Recommended to be at least 4 in [101.6 mm] wider than finished actual opening [AO] to overlap walls by 2 in [50.8 mm] on each side. Door must be minimum three times (3x) gap [G] dimension + 2 in [50.8 mm].

**Door height [H]** \_\_\_\_\_

**Door thickness [TH]** \_\_\_\_\_  
 Minimum: 1 3/4 in [45 mm]

**Door weight** \_\_\_\_\_ lbs  
 Maximum: 300 lbs [136 kg] kg

### Track System

**How will the track be mounted?**

Wall (Barn/Side) Mount      Top Mount

**If side mount, select fascia style:**



**Catch 'N' Close?**  
 Catch 'N' Close       No Catch 'N' Close

### Overlaps

With door in closed position

**Door overlap at strike side of opening [OS]** \_\_\_\_\_  
 Recommended minimum 2 in [50.8 mm].

**Door overlap at jamb side of opening [OJ]** \_\_\_\_\_  
 Recommended minimum 2 in [50.8 mm].

**Door overlap on guide system [OG]** \_\_\_\_\_  
 Minimum 4 in [101.6 mm]. Typically, door protrusion [P] dimension + door overlap at jamb side [OJ] dimension.





### Additional Notes

**Please forward any elevation and plan view drawings you have available for this application.**

### Opening Details

**Number of openings** \_\_\_\_\_  
 If multiple handings and/or door sizes on project, please submit one application form per unique opening.

**Door handing**  
 If handing is unknown at time of submitting application request, default handing will be **RHO** as shown in detailed drawings.

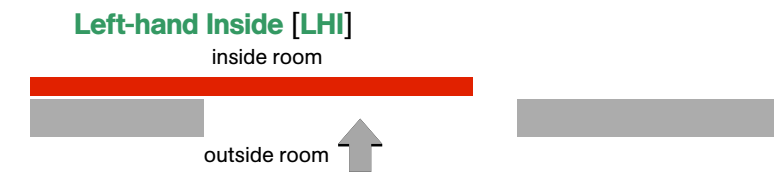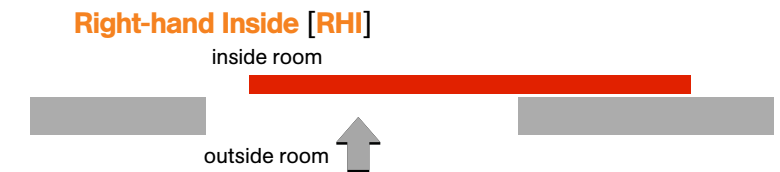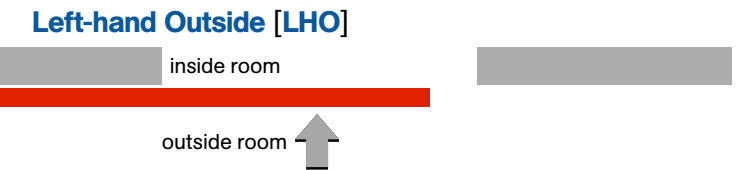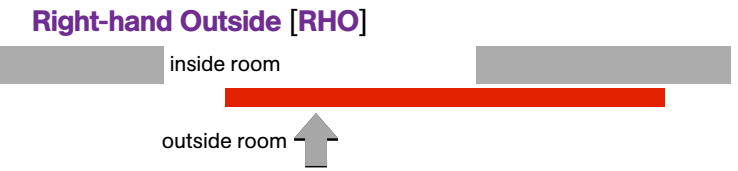

**Clear opening [CO]** \_\_\_\_\_  
 What is the clear opening width from leading edge of door to finished strike side?

**Door protrusion [P]** \_\_\_\_\_  
 Does the door clear the opening or will it protrude into the opening due to barrier-free lockset or handle pulls? If the door will protrude, the recommended minimum protrusion is 4 1/2 in [114.3 mm].

**Actual opening [AO]** \_\_\_\_\_  
 Typically, clear opening [CO] dimension + door protrusion [P] dimension.

**Gap [G]** \_\_\_\_\_  
 Maximum gap allowed is 16 in [406.4 mm].

**Gap centerline position [GP]** \_\_\_\_\_  
 Typically, gap is located in center of clear opening [CO], if not, dimension is taken from strike side of clear opening.

**Are there any wall space restrictions?**

No  
 Yes



1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3  
 T. 1-866-999-1562 customerservice@kncrowder.com kncrowder.com  
 © 2020-2025 K.N. Crowder Mfg. Inc. All Rights Reserved.

This drawing is the property of K.N. Crowder Mfg. Inc. and is subject to return upon demand.  
 It must not be traced, copied, or reproduced in any manner, nor submitted to any outside parties for examination without our consent.