



FEATURES

Adjustable Blade Steel Door Louver

- For 1 3/8 in [34.9 mm] to 1 3/4 in [44.5 mm] doors
- Z-blades riveted to operating bar and frame at 1 in [25.4 mm] intervals in welded 1 1/2 in [38.1 mm] deep frame
- Mechanical stop holds blades open
- Blades are operated by a manual adjusting lever
- Self-attaching, mitered frame with welded corners: screws fasten through frame into louver core, leaving corridor side of frame free of fasteners
- 18-gauge cold rolled steel frame and 16-gauge blades
- Custom sizing (min. cut-out size 8 in [203.2 mm] x 6 in [152.4 mm], max. cut-out size 24 in [609.6 mm] x 36 in [914.4 mm])
- 45% free area for optimal airflow

CUSTOM SIZE

(dimensions are door cut-out size, unless specified otherwise)

_____ wide x _____ high

OPTIONS

Finish

Standard mineral bronze powder coat (B)

Special order colours _____

AMS Beige (AB)	Brass (BRA)	Gray (G)
SC Beige (SB)	Black (BK)	Silver (SI)
Sand (S)	Flat Black (FBK)	White (W)

Add-on for Corrosion Resistance and Exterior Use

(available with above finish)

Zinc-plated

Fastener



#8 x 3/4" Phillips Head Screws, matches finish



Security torx screws

Screen

No screen

Nylon insect screen - black fibreglass screen with 18 x 16 mesh

Aluminum bird screen - silver aluminum screen with 18 x 16 mesh

Customer Name


Job No./Name

Date

Provided By

Notes

PRODUCT DIMENSIONS

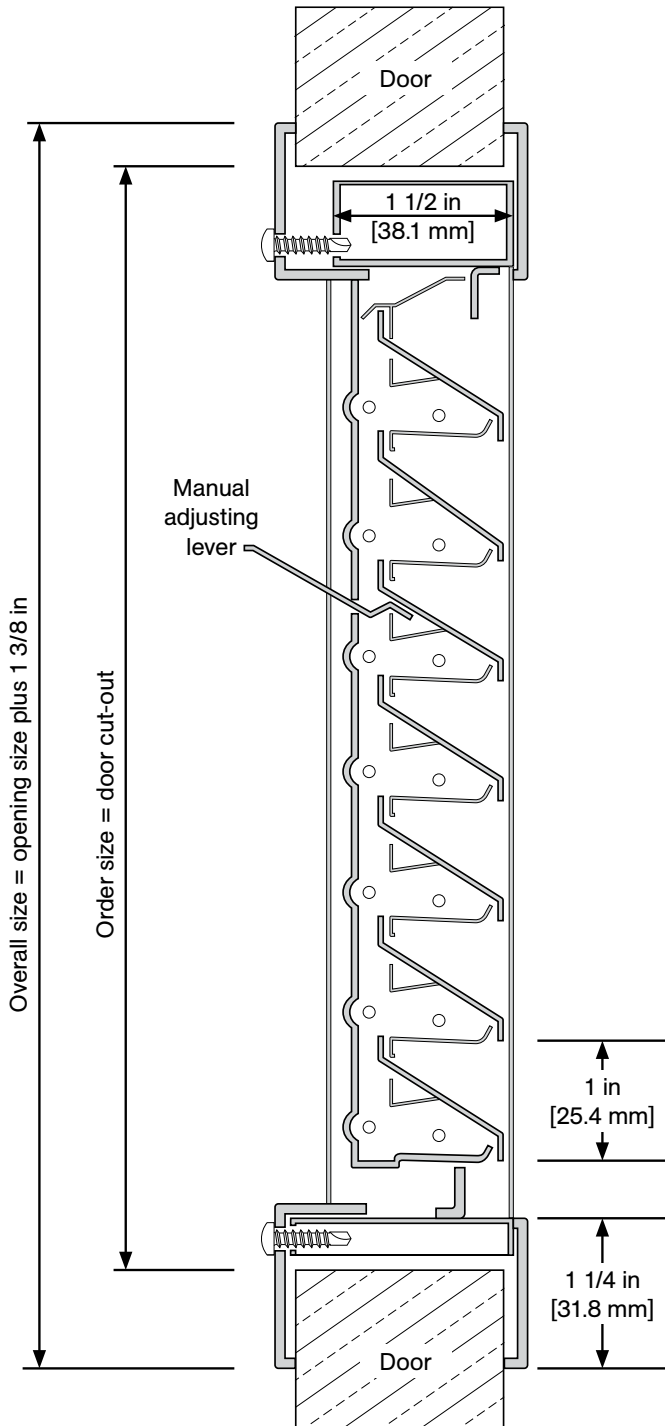

Customer Name

Job No./Name

Date

Provided By

Notes