

SDL-TR70



FEATURES

Flush-Mounted Transom Steel Door Louver

- For hollow metal frame doors
- 2 rows of sight-proof, inverted, split Y-blades at 1 in [25.4 mm] intervals in frame with interlocking construction to 1 13/16 in [46 mm] deep assembly mounted in a "U" channel frame
- 18-gauge cold rolled steel frame and blades
- Custom sizing (min. cut-out size 10 in [254 mm] x 10 in [254 mm], max. cut-out size 36 in [914.4 mm] x 36 in [914.4 mm])
- Multiple sections can be combined for larger sizes
- 50% free area for optimal airflow

CUSTOM SIZE

(dimensions are door cut-out size, unless specified otherwise)

_____ wide x _____ high

OPTIONS

Finish

Standard mineral bronze powder coat (B)

Stainless steel #4

Special order colours _____

AMS Beige (AB)	Brass (BRA)	Gray (G)
SC Beige (SB)	Black (BK)	Silver (SI)
Sand (S)	Flat Black (FBK)	White (W)


Add-on for Corrosion Resistance and Exterior Use

(available with above finish)

Galvanneal sheet

Zinc-plated

Fastener



Hex Head Self-Drilling Tek Screws with Mounting Clips

Screen

No screen

Nylon insect screen - black fiberglass screen with 18 x 16 mesh

Aluminum bird screen - silver aluminum screen with 18 x 16 mesh

Customer Name _____


Job No./Name _____

Date _____

Provided By _____

Notes

PRODUCT DIMENSIONS

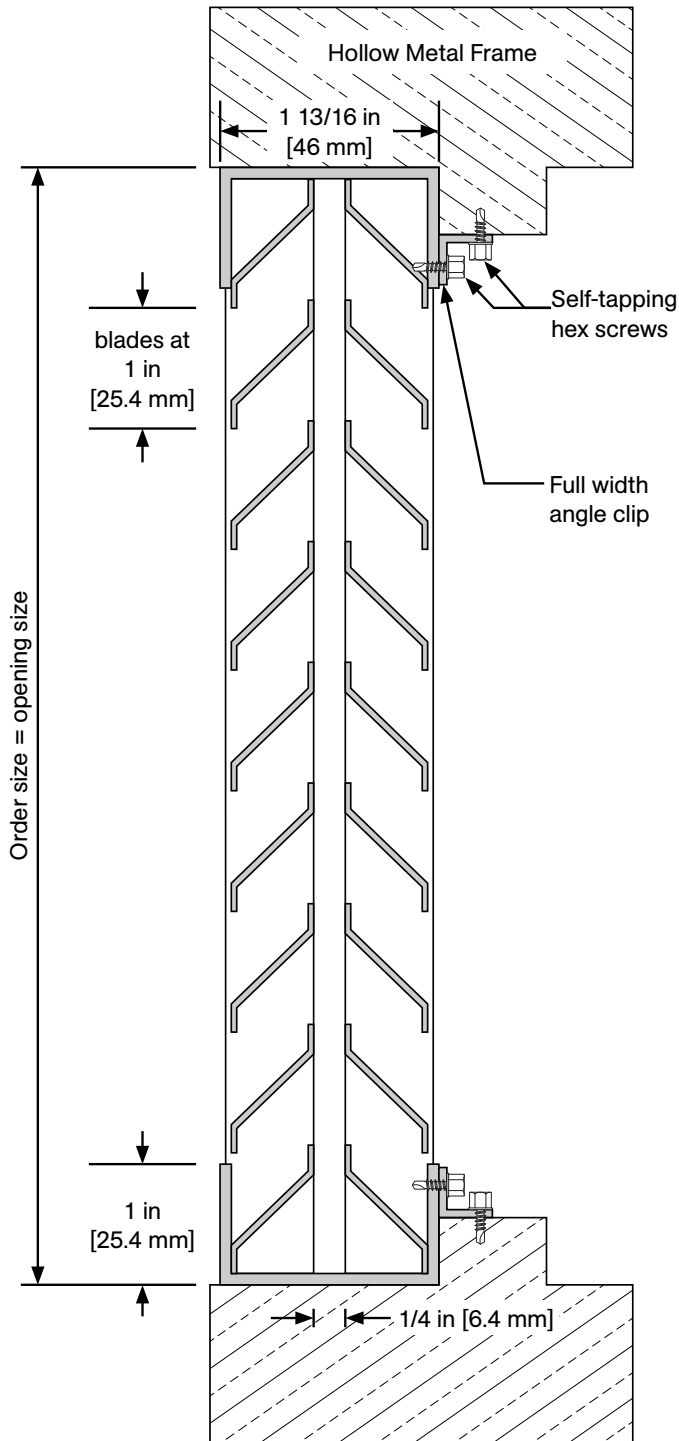

Customer Name

Job No./Name

Date

Provided By

Notes