



## FEATURES

### Steel Door Louver

- For 1 3/4 in [44.5 mm] doors
- Suitable for schools, class “A” and institutional buildings
- Sight-proof, inverted Y-blades at 1 in [25.4 mm] intervals in frame with interlocking construction to welded 1 in [25.4 mm] deep frame
- Self-attaching frame with 1 1/4 in [31.7 mm] trim, mitered and welded corners: screws fasten through frame into louver core, leaving corridor side of frame free of fasteners
- 18-gauge cold rolled steel frame and 20-gauge blades
- Custom sizing (min. cut-out size 6 in [152.4 mm] x 4 in [101.6 mm], max. cut-out size 48 in [1219.2 mm] x 80 in [2032 mm])
- Multiple sections can be combined for larger sizes
- 50% free area for optimal airflow

## STANDARD SIZES

Width Inches	x	Height Inches	Width Inches	x	Height Inches
<b>Mineral Bronze Powder Coat</b>			<b>18</b>	<b>x</b>	<b>18</b>
12	x	8	20	x	12
12	x	12	24	x	12
12	x	18	24	x	18
18	x	12	24	x	24

## CUSTOM SIZE

(dimensions are door cut-out size, unless specified otherwise)

\_\_\_\_\_ wide x \_\_\_\_\_ high

## OPTIONS

### Finish

Standard mineral bronze powder coat (B)

Stainless steel #4

Special order colours

AMS Beige (AB)	Brass (BRA)	Gray (G)
SC Beige (SB)	Black (BK)	Silver (SI)
Sand (S)	Flat Black (FBK)	White (W)

### Add-on for Corrosion Resistance and Exterior Use

(available with above finish)

Galvanneal sheet

Zinc-plated

### Fastener



#8 x 3/4" Phillips Head Screws, matches finish



Security torx screws

### Screen

No screen

Nylon insect screen - black fibreglass screen with 18 x 16 mesh

Aluminum bird screen - silver aluminum screen with 18 x 16 mesh

Customer Name


Job No./Name

Date

Provided By

Notes

## PRODUCT DIMENSIONS

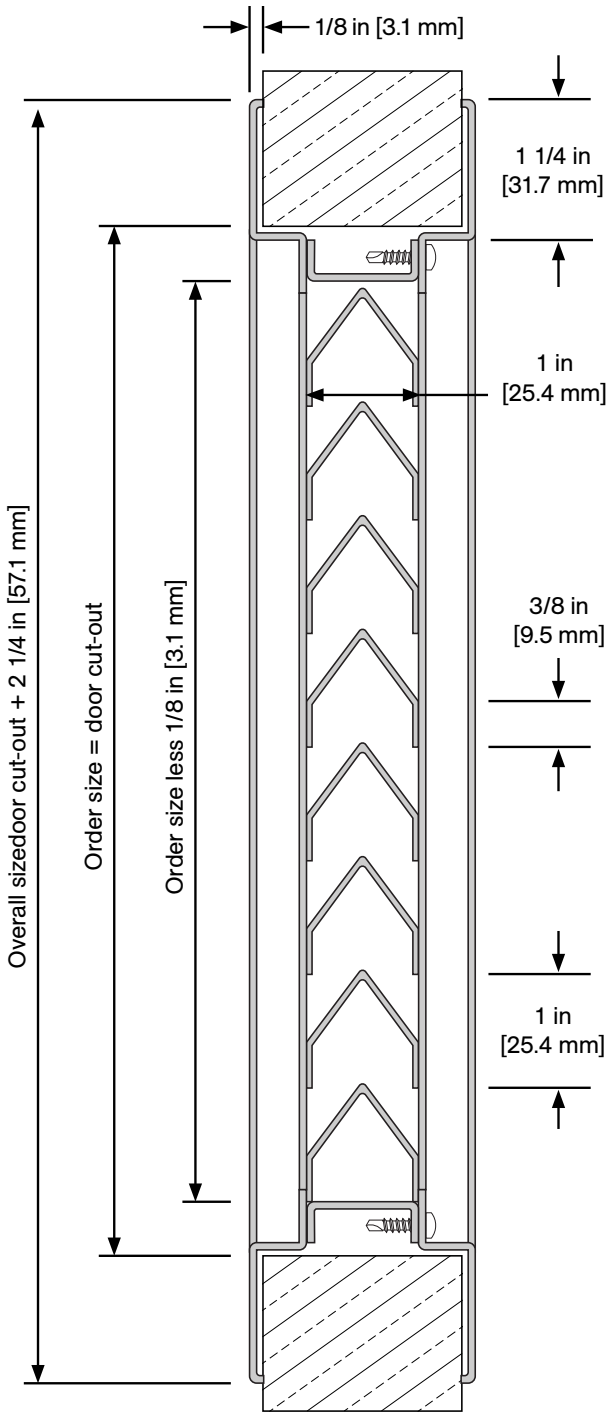

Customer Name

Job No./Name

Date

Provided By

Notes